




REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
REV	ECNNO	LOCATIONS	DESCRIPTION	DATE	REVISER	

NOTES:

- MATERIAL.
 - INSULATOR: PBT UL94-V0
 - FONT SHELL: PHOSPHOR BRONZE(T=0.30).
 - REAR SHELL: SPCC (T=0.30).
 - CONTACT: PHOSPHOR BRONZE(T=0.25).
 - SPRING: PHOSPHOR BRONZE.
- FINISH
 - FONT SHELL: TIN-PLATED/UNDER-PLATED CU 80u" OVER-PLATED Sn-Pb120u".
 - REAR SHELL: NI-PLATED (UNDER-PLATED Cu 80u" OVER-PLATED Ni 120u").
 - CONTACT: PLATED SEE PART NO.
 - SPRING: NI-PLATED/UNDER-PLATED CU 80u" OVER-PLATED Sn-Pb120u".
- ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: 5AMP.
 - VOLTAGE: 30 VAC(R.M.S).
 - CURRENT: 10AMP MAXIMUM PER CONTACT AT 30°C.
 - CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM INITIAL.
 - INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM.
 - DIELECTRIC WITHSTANDING VOLTAGE: 750V AC AT SEE LEVEL.
 - TEMPERATURE: -55°C-85°C.

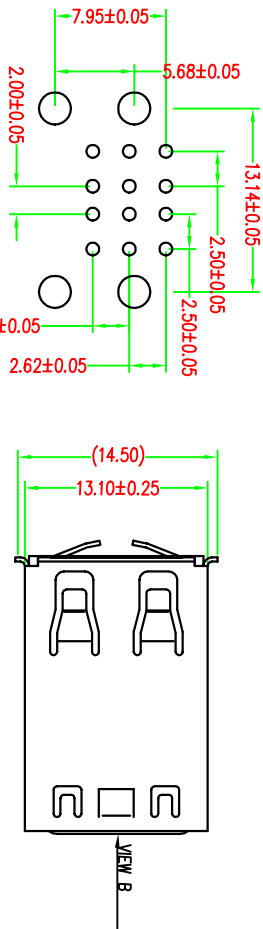

P.C.B LAYOUT

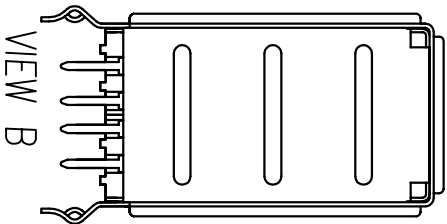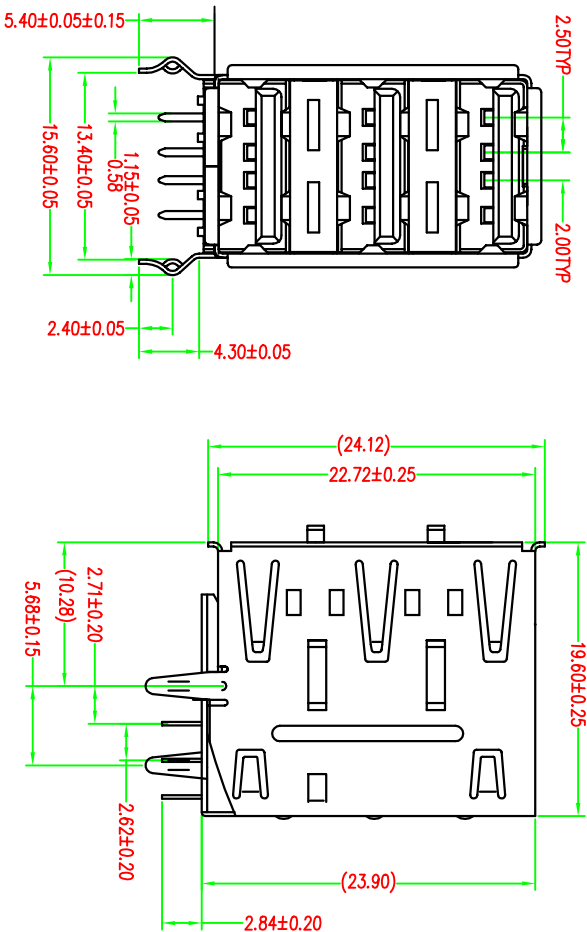

8	Back-shell	1		Nickel plated oil
7	Front-shell	1		Sn-Pb plated oil
6				
5	Spring	2		Nickel plated oil
4	Contact	4		Selective Au plated on mating area
3	Contact	4		
2	Contact	4		
1	Housing	1		Black
No.	Name	Qty	Part No.	Finish

PART NO:	PARTNO.	MATERIAL:	MATERIAL	HSE HSI-CHIN ELECTRONICS CO.,LTD USB THREE PORT R/A DIP KINK TYPE		
MODEL NO:	MOLDNO.	FINSH:	FINISH			
UNIT:	SIZE:	COLOR:	COLOR			
TOLERANCE UNSPECIFIED		DR:	DR			
.X	.X	CHK:		DWG NO:	HC-070	REV: REV
.XX	.XX	APP:		SCALE:	SCALE	SHEET
.XXX	.XXX					
ANG.	ANG.					