



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REWSER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze,t=0.25mm.
- 1.3 Shell: Stainless steel,t=0.20mm.

- 2.Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55℃~+105℃

3.Finishes:

3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".

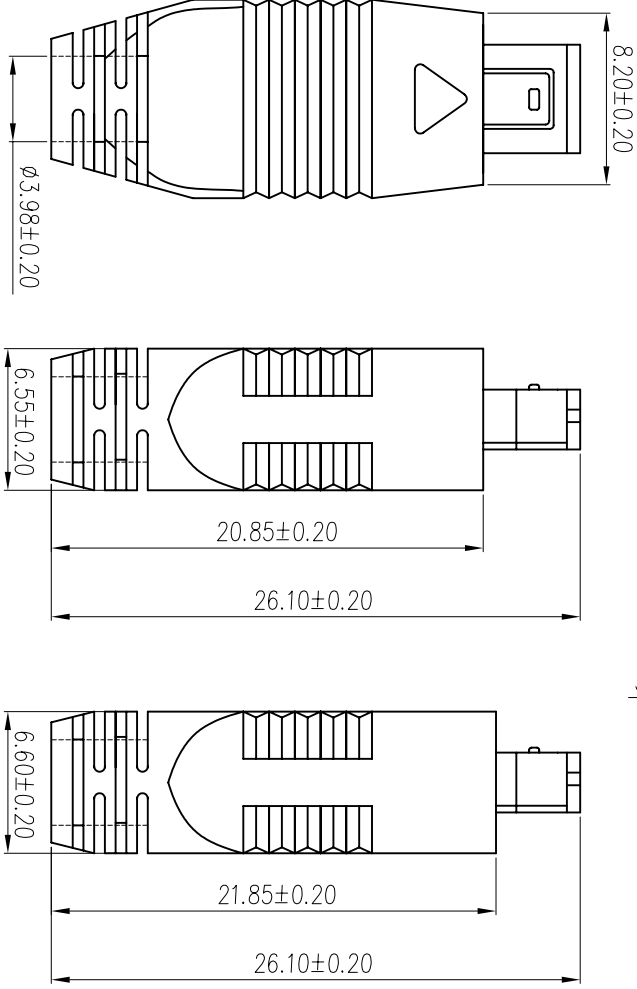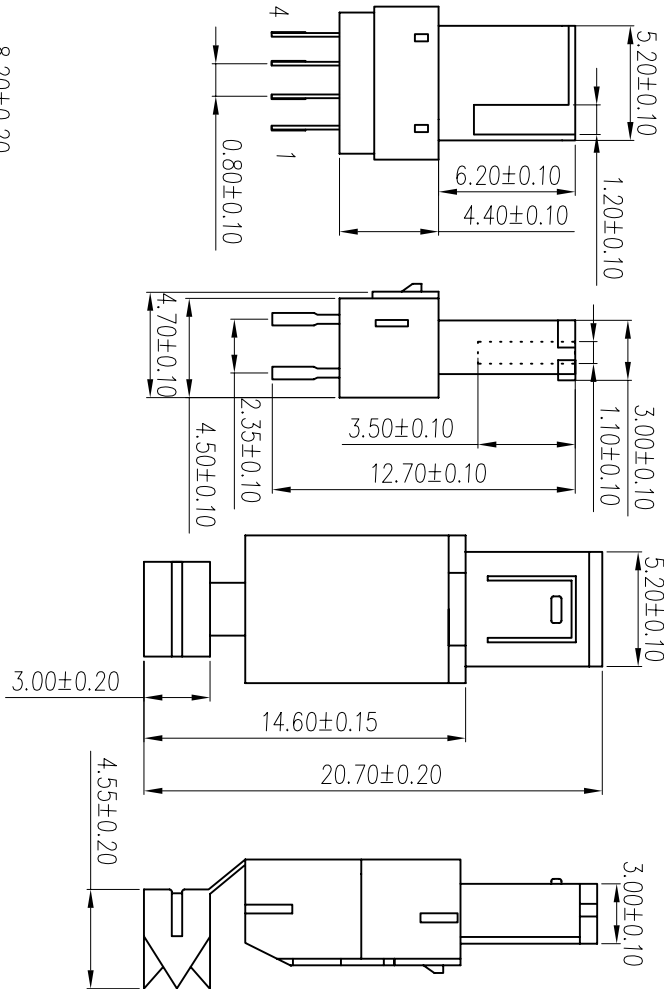

4	Hood	1	P.B.T	UL 94-V0	Black
3	Shell	1	Stainless steel	T=0.20mm	No Finish
2	Contact	4	Phosphor bronze	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:	HSI-CHIN ELECTRONICS CO.,LTD			
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME:	MINIUSB-A(HRS) TYPE(M) ASSEMBLY(單面防呆)	
TOLERANCE UNSPECIFIED	DR: 段林麗	06/05/05	DWG NO:	S/A-328	REV: A0
.x ±0.3	CHK:Kevin	06/05/05	SCALE: 2:1	SHEET: 1 of 1	
.xx ±0.20	APP:Kent	06/05/05			
.xxx ±0.100					
ANG. ±T					