





REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Front shell: Cold rolled steel,t=0.30mm;
Back shell: Cold rolled steel,t=0.30mm.

- 2.Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts: Gold flashed 1u", 3u", 5u", 10u", 15u", 30u".
- 3.2 Shell: Nickel Or Tin Plated.

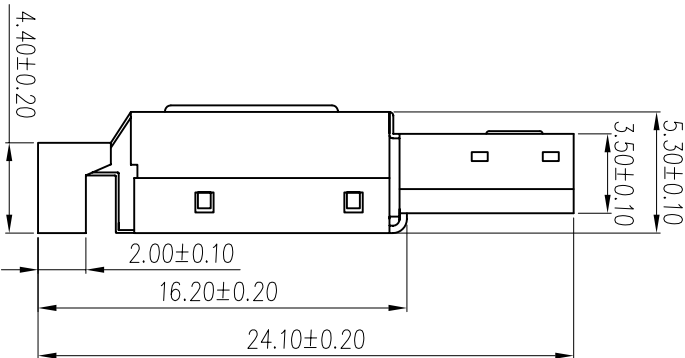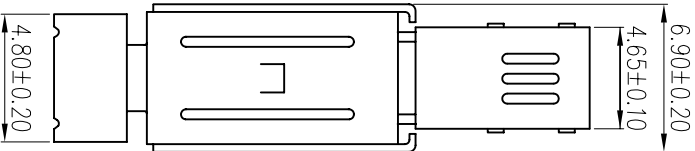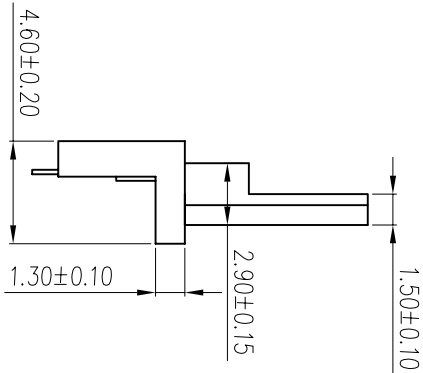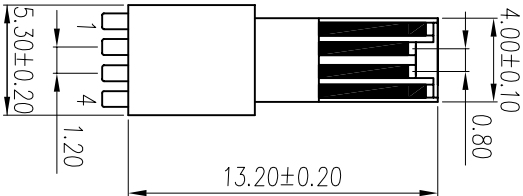

4	Back-shell	1	Cold rolled steel	T=0.30mm	Nickel or Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.30mm	Nickel or Tin Plated
2	Contact	4	Brass	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks & Thickness	Finish
PART NO:	MATERIAL:	HSI-CHIN ELECTRONICS CO.,LTD			
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME:	MINI USB-4P(mitsumi) B TYPE SOLDER(M)	
TOLERANCE UNSPECIFIED			DR: 段林麗 06/05/05	DWG NO:	REV: A0
.x ±0.3			CHK: Kevin 06/05/05	SCALE: 3:1	SHEET: 1 of 1
.xxx ±0.20			APP: Kent 06/05/05		
ANG. ±1°					