

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
A1		材質變更	鐵殼材質由不鏽鋼變更爲磷銅	'04/12/02	<i>Oyhtuu</i>	<i>Nick</i>

Note:

1.Material:



- 1.1 Insulator: L.C.P or PA46 UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze,t=0.25mm.
- 1.3 Shell: Phosphor bronze ,t=0.20mm.


2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 24.5 Newtons Max.
- 2.6 Total unmating force: 4.9 Newtons Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u”3u”5u”10U”15u”30u”.
- 3.2 Shell:Tin Plated.

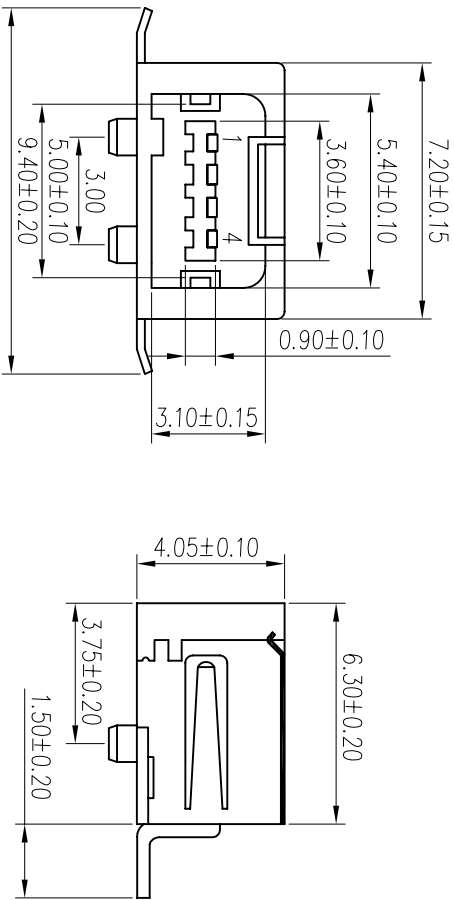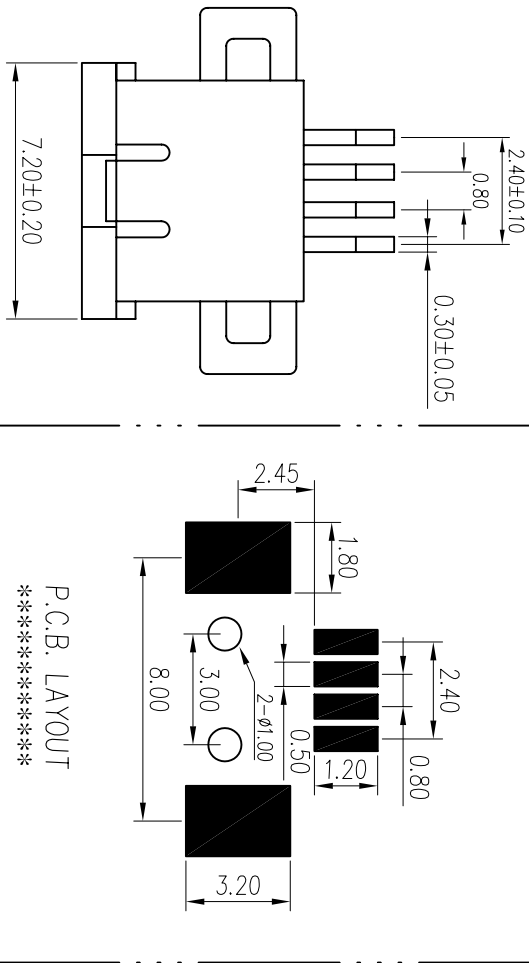

3		Shell	1	Phosphor bronze	T=0.20mm	Tin Plated
2		Conduct	4	Phosphor bronze	T=0.25mm	Gold Flashed
1		Housing	1	L.C.P or PA46	UL 94-V0	Black/Ivory
No.		Name	Q'ty	Material	Remarks & Thickness	Finish
PART NO:		MATERIAL:		<div>HSI-CHIN ELECTRONICS CO.,LTD</div>		
MODEL NO:		FINISH:				
UNIT: mm		COLOR:				
SIZE: A4		PART NAME:		MINIUSB-A(HRS) TYPE(F) S.M.(單面防呆)		
TOLERANCE UNSPECIFIED		DR: 段林麗		06/05/05		
.x		CHK: Kevin		06/05/05		
.xx		APP: Kent		06/05/05		
.xxx		SCALE: 2:1		SHEET: 1 of 1		
ANG.		±1°		<div></div>		