
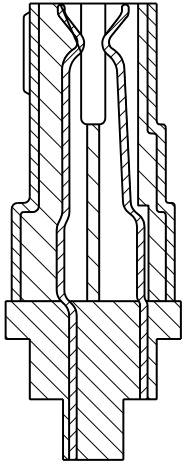

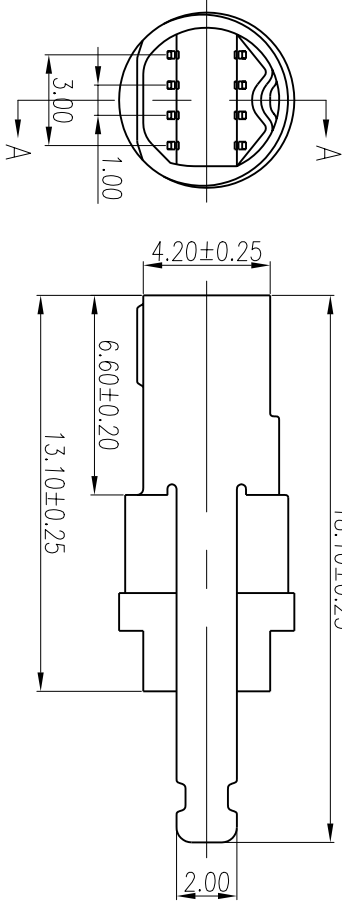


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: $30\text{ m}\Omega$ Max.
4. Insulation resistance: $100\text{ M}\Omega$ Min at DC 500V.
5. Temperature range: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

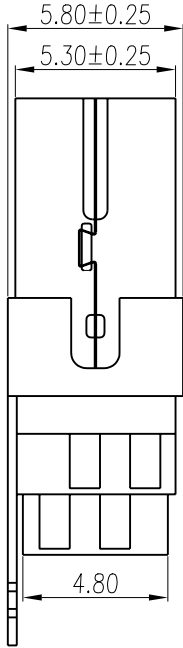

SECTION A-A

3	Shell	1	Brass	T=0.30mm	80~120u"Nickel Plated
2	Contact	8	Phosphor Bronze	T=0.25mm	Contact area:0.8~1.2u" Gold Plated over 40u"Nickel min. Solder area:80~120u" Tin Plated over 40u"Nickel min.
1	Housing	1	L.C.P	NO	Black
No.	Part Name	Q'ty	Material	Remarks&Thickness	Finish/Color
PRAT NO:			MATERIAL:		
MODEL NO:			FINSH:		
UNIT: mm			PART NAME:		
SAZE: A4			MINI USB-8PIN(M) 四型		
TOLERANCE UNSPECIFIED			DWG NO:		
X .XX XXX ANG			CHK: Kevin 06/12/02 APP: Kent 06/12/02		
±0.30 ±0.20 ±0.10 ±1°			SCALE: 4:1 SHEET: 1 of 1		
			REV. A0		
			