

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:



- 1.1 Insulator: L.C.P UL 94-V0 rated.
1.2 Contact: Brass T=0.20mm
1.3 Shell: Brass T=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) or 1 minute.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
2.5 Temperature range: -55℃~+105℃


3.Finishes:

- 3.1 Contacts:Gold flashed 3u”
3.2 Shell:Nickel

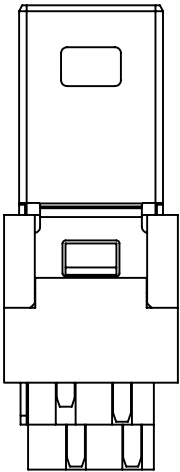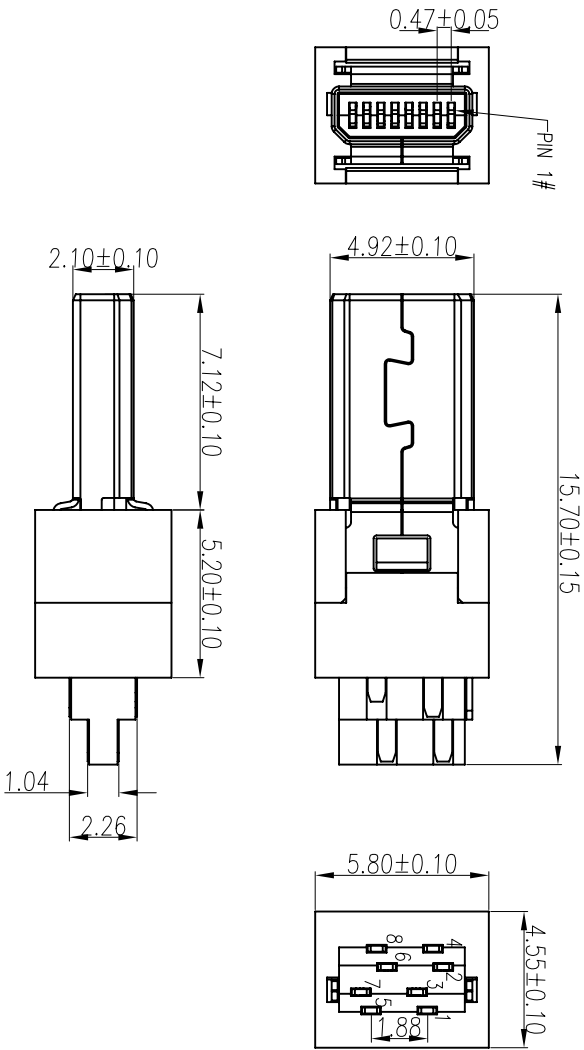

3	Shell	1	Brass	T=0.30	Nickel
2	Contact	8	Brass	T=0.20	Gold Flashed
1	Housing	1	L.C.P	UL 94-V0	Black/Ivory
No.	Name	Qty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:	
MODEL NO:		FINSH:	
UNIT: mm	SIZE: A4	COLOR:	
TOLERANCE UNSPECIFIED			
.x	±0.20	DR: 李霞	06/05/12
.xx	±0.10	CHK: Kevin	06/05/12
.xxx	±0.05	APP: Kent	06/05/12
ANG.	±1°		

PART NAME:			
MINI USB-8P焊線式單排			
DWG NO:	S/A-332	REV:	A0
SCALE: 4:1	SHEET: 1 of 1		

**HSI-CHIN** ELECTRONICS CO.,LTD