
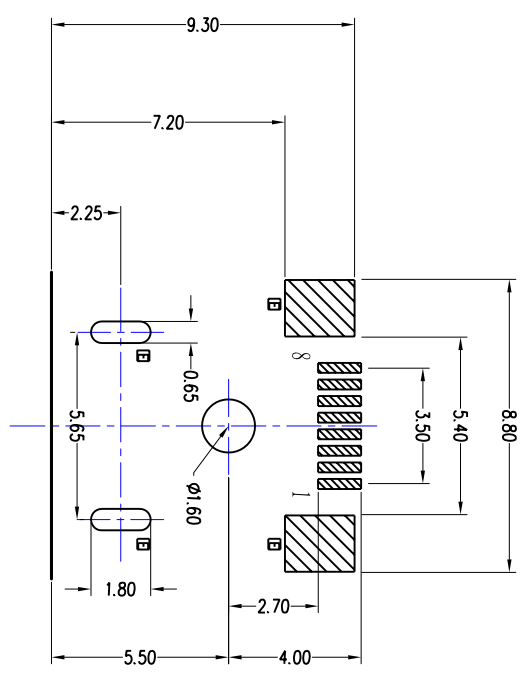
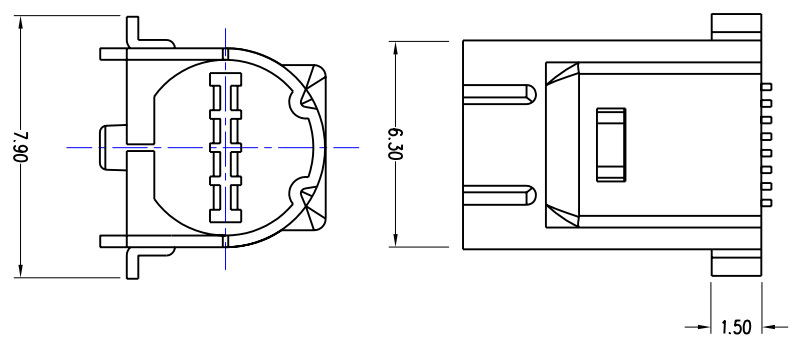
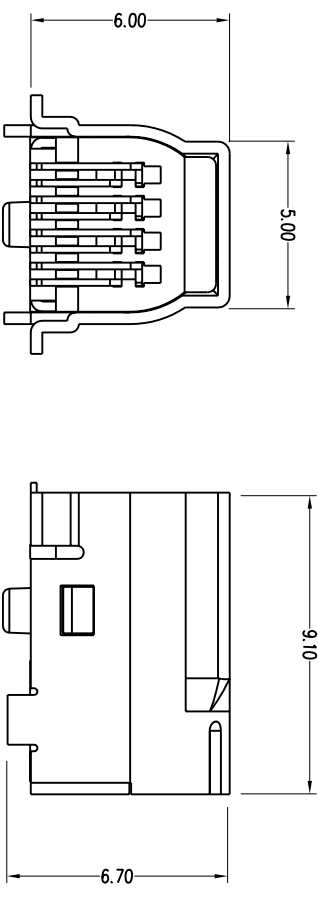


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVER	APPO
REV	ECMNO	LOCATIONS	DESCRIPTION	DATE	REVER	

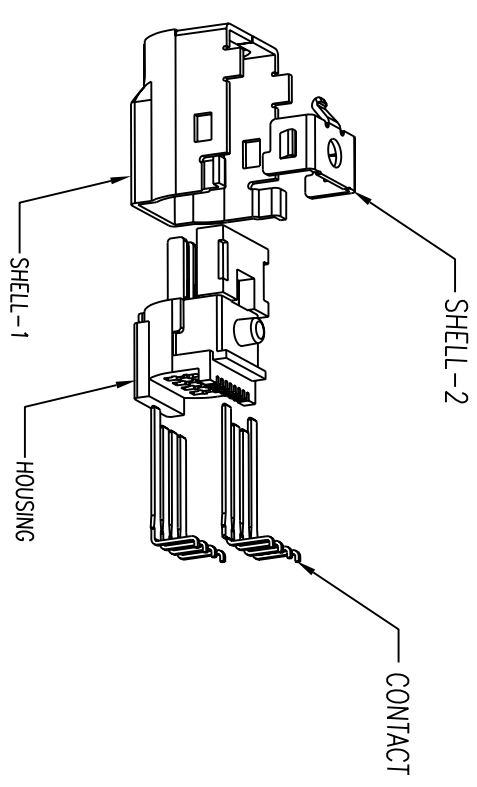

PART NO.	PARTNO.	MATERIAL:	MATERIAL
MODEL NO:	MOLDNO.	FINSH:	FINISH
UNIT:	UNIT	SIZE:	SIZE
TOLERANCE UNSPECIFIED			
.X	.XX	.XX	.XX
.XXX	.XXX	.XXX	.XXX
ANG.	ANG.	ANG.	ANG.
PART NAME: MINI USB 8S S.M.T.			
DWC NO: HC-102			
CHK:			
APP:			
SCALE: SCALE			
SHEET: SHEET			
REV: REV			

No.	Name	Q'ty	Part No.	Finish
4	shell 2			Nickel plated all
3	shell 1			Tin plated all
2	Contact	8		Selective 3u" Au plated on mating oreo
1	Housing	1		Block

- 2.Specification:
- 2.1 Current rating: 1 A Max.
  - 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
  - 2.3 Contact resistance: 30 mΩ Max.
  - 2.4 Insulation resistance: 1000 MΩ Min.
  - 2.5 Total mating force: 3.5 Kgf Max.
  - 2.6 Total unmating force: 1.0 Kgf Min.
  - 2.7 Temperature range: -55°C~85°C

- Note:
- 1.Material:
- 1.1 Insulator: L.C.P.
  - 1.2 Contact: PHOSPHOR BRONZE,t=0.2mm
  - 1.3 Shell:PHOSPHOR BRONZE ,t=0.30mm

