


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

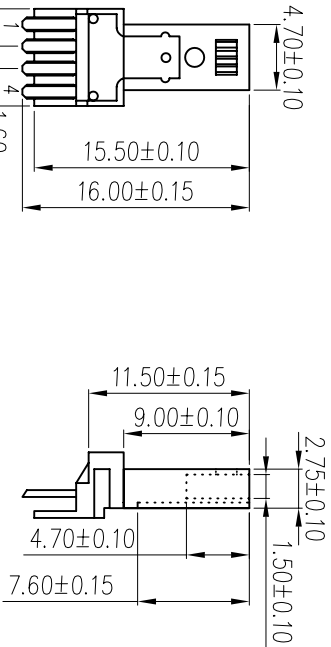

Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Brass,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u"3u"5u"10U",15u",30u".
- 3.2 Shell:Nickel Plated.

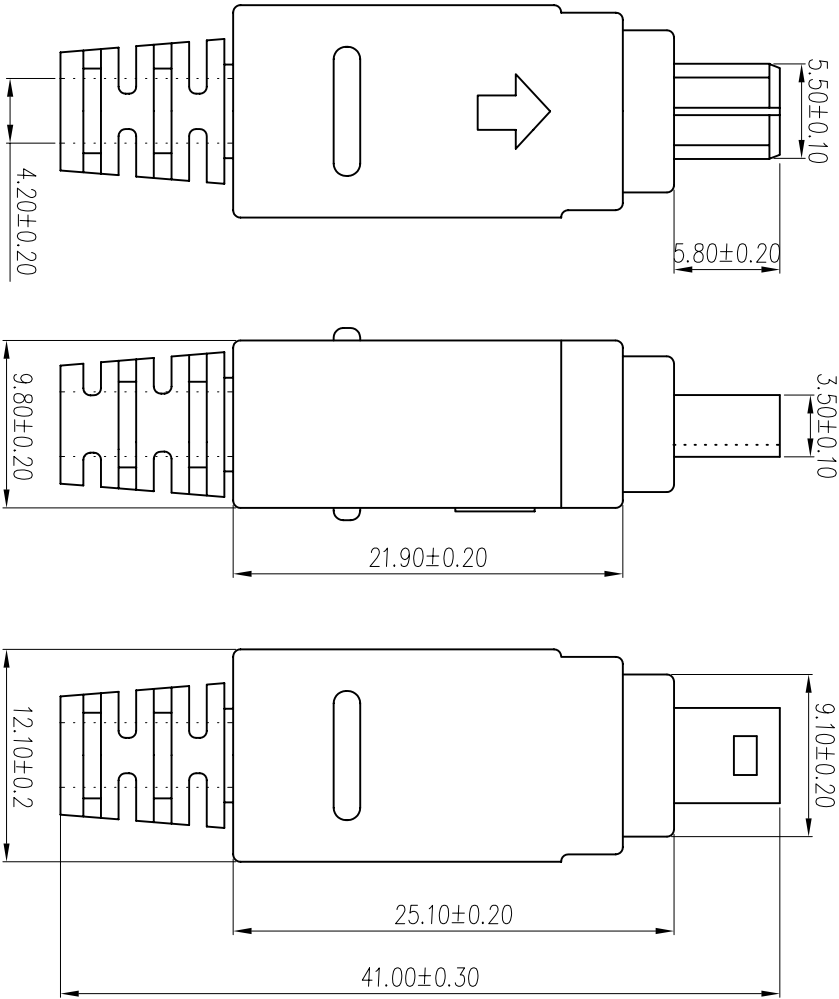

5	Hood	1	P.B.T	UL 94-V0	Block
4	Back-shell	1	Brass	T=0.30mm	Nickel Plated
3	Front-shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish
PART NO:	MATERIAL:				
MODEL NO:	FINSH:				
UNIT:	mm	SIZE:	A4	COLOR:	
TOLERANCE UNSPECIFIED			DR: 黄義强	05/06/10	
.x	±0.3	DWG NO:	IEEE 1394-4PIN(M)	ASSEMBLY SR	ODØ4.2
.xx	±0.20	CHK: Song	05/06/10	S/A-336	REV: A0
.xxx	±0.100	APP: Kent	05/06/10	SCALE: 2:1	SHEET: 1 of 1
ANG.	±1°				

**HSI-CHIN** ELECTRONICS CO.,LTD