

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:

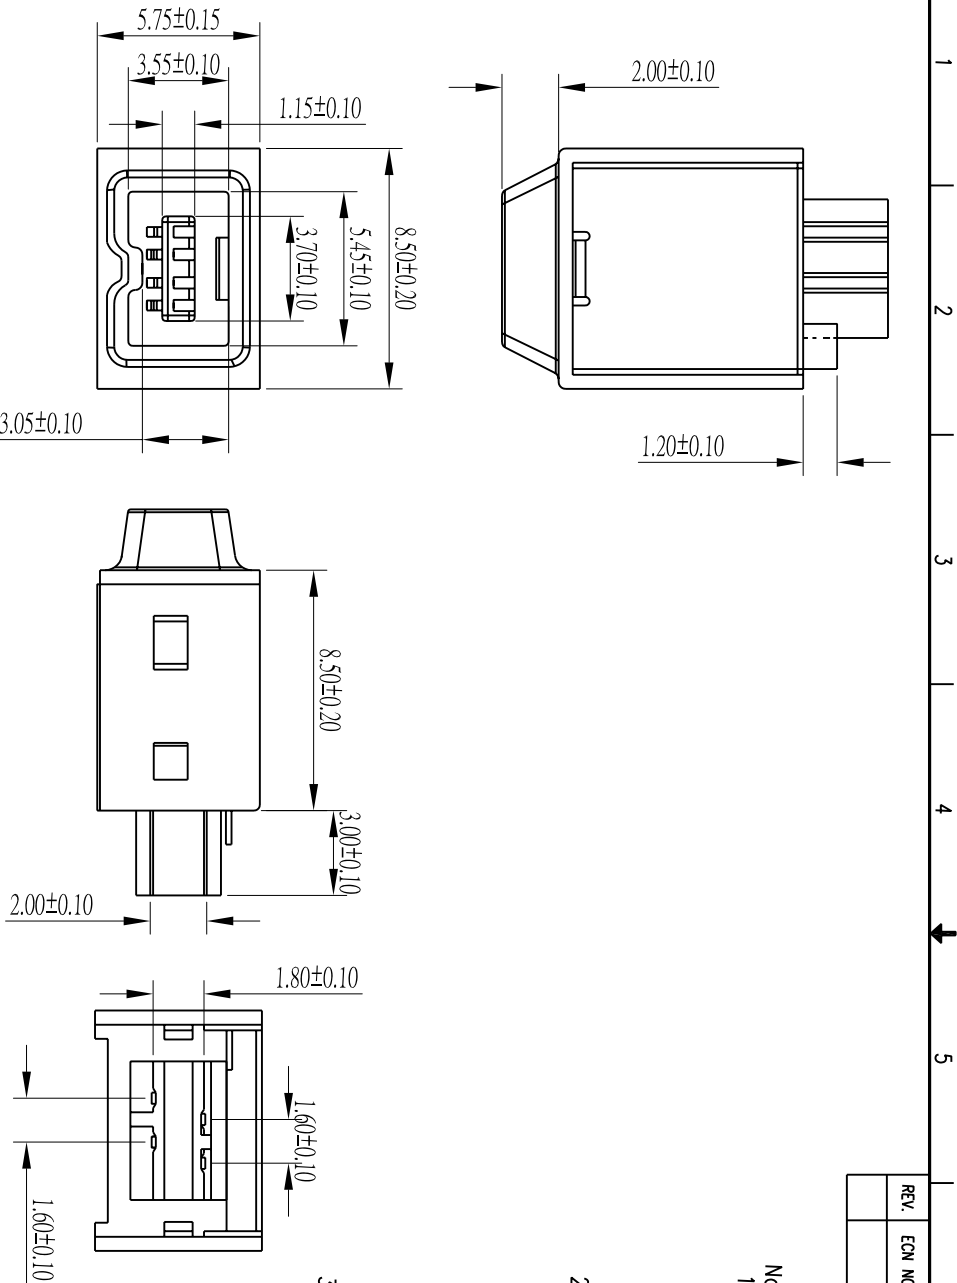
- 1.1 Insulator: PA6T UL 94-V0 rated.
- 1.2 Contact: Copper alloy,t=0.20mm.
- 1.3 Front Shell: Copper alloy t=0.50mm
- 1.4 Back Shell: Phosphor bronze t=0.20mm

2.Specification:



- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min at DC 500V.
- 2.5 Total moting force: 4.0 Kgf Max.
- 2.6 Total unmating force: 0.5 Kgf Min.
- 2.7 Temperature range: -40℃~+85℃

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell:Nickel Plated.



4	Back shell	1	Phosphor bronze	T=0.20mm	No Finish
3	Front shell	1	Copper alloy	T=0.50mm	Tin Plated
2	Contact	4	Phosphor bronze	T=0.20mm	Gold Flashed
1	Housing	1	PA6T	UL 94-V0	Black/Ivory/Gray
No.	Name	Qty	Material	Remarks	Finish

PART NO:		MATERIAL:		<div>HSI-CHIN ELECTRONICS CO.,LTD</div>	
MODEL NO: QY		FINISH:			
UNIT: mm	SIZE: A4	COLOR:			
TOLERANCE UNSPECIFIED		DR: 常 各 03/10/11		PART NAME: MINI 1394 A母 4PIN(F) 焊線式	
.x ±0.3	CHK: Song 03/10/11				
.xx ±0.20	APP: Kent 03/10/11				
.xxx ±0.100	SCALE: 4:1				
ANG ±1°	SHEET: 1 of 1				
		REV: A0		<div></div>	

