


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Brass,t=0.40mm.

- 2.Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.5 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55℃~+105℃


3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell:Tin Plated.

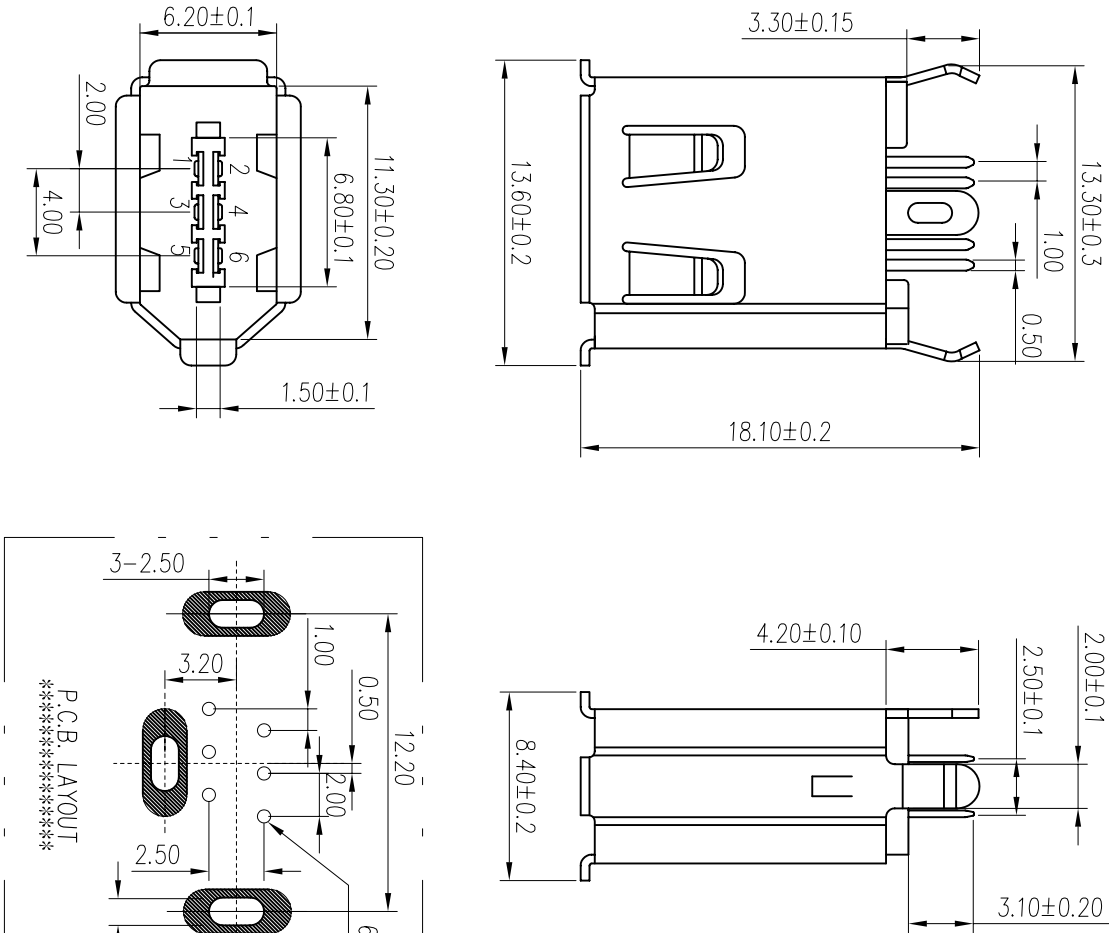

3	Shell	1	Brass	T=0.40mm	Nickel Plated
2	Contact	6	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:	
MODEL NO:		FINSH:	
UNIT: mm	SIZE: A4	COLOR:	
TOLERANCE UNSPECIFIED		DR: 段林麗 06/03/01	
.x ±0.3		CHK: Song 06/03/01	
.xx ±0.20		AP: Kent 06/03/01	
.xxx ±0.100		SCALE: 3:1	
ANG. ±1°		SHEET: 1 of 1	
		REV: AO	

	
HSI-CHIN ELECTRONICS CO.,LTD	

