

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REWSER	APPD

Note:

1.Material:




- 1.1 Insulator: PA6T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Brass,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.5 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell:Nickel Plated.

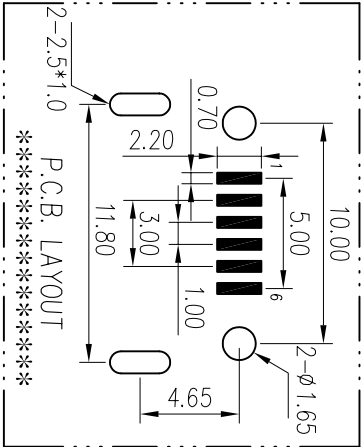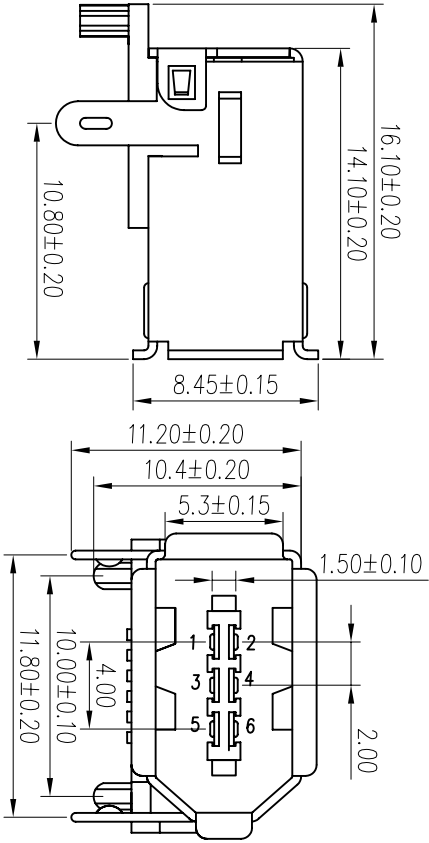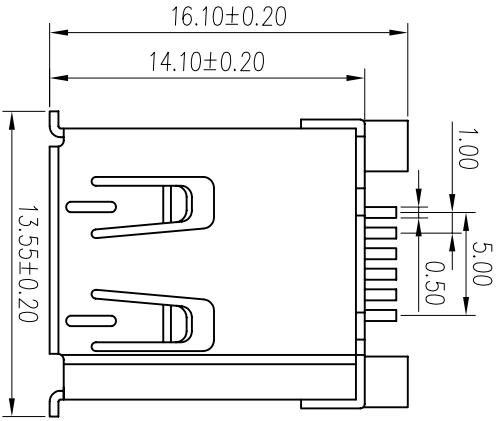

3	Shell	1	Brass	T=0.40mm	Nickel Plated
2	Contact	6	Brass	T=0.25mm	Gold Flashed
1	Housing	1	PA6T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:	HSI-CHIN ELECTRONICS CO.,LTD			
MODEL NO:	FINISH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME:		
TOLERANCE UNSPECIFIED			IEEE 1394-6PIN (F) S.M.T		
.x	±0.3	DR: 段林耀	DWG NO:		
.xx	±0.20	06/03/02	CHK: Song		
.xxx	±0.100	06/03/02	AP: Kent		
ANG.	±1°	06/03/02	SCALE: 4:1		
			SHEET: 1 of 1		
			REV: A0		