

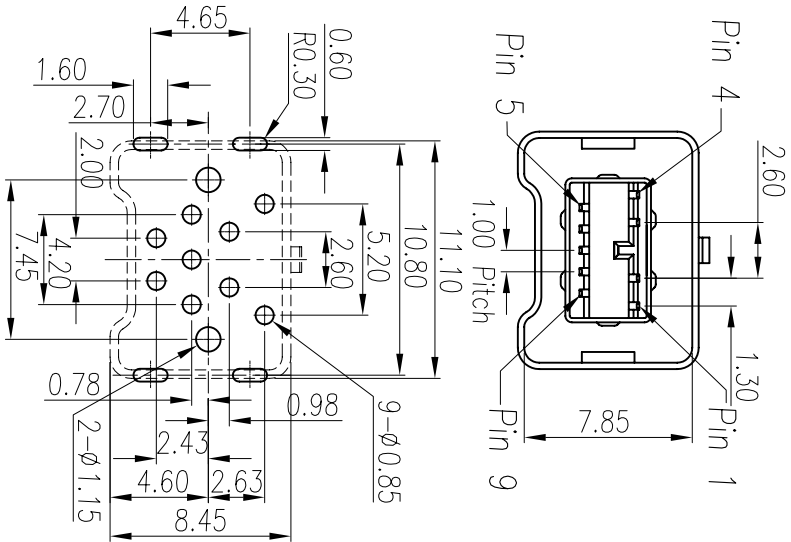

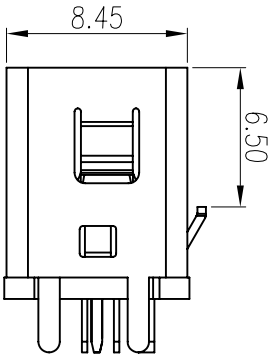


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Note:

1.Material:

- 1.1 Insulator: PA6T G.F. UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Phosphor bronze,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1.5 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 minute.
- 2.3 Contact resistance: 50 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min at DC 100V.
- 2.5 Total mating force: 4.5 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: Operating: -40°C~+85°C  
Storage:-40°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell:Tin Plated.

3	Back shell	1	Brass	T=0.30mm	Tin Plated
3	Front shell	1	Brass	T=0.30mm	Tin Plated
2	Contact	6	Phosphor bronze	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Gray
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

**HSI-CHIN ELECTRONICS CO.,LTD**

PART NO:	MATERIAL:	PART NAME:
MODEL NO:	FINSH:	IEEE 1394-9PIN(F) 180° DIP
UNIT: mm	SIZE: A4	COLOR:
TOLERANCE UNSPECIFIED		
.x	±0.2	DR: 李霞
.xx	±0.10	CHK:Kevin
.xxx	±0.05	06/05/11
ANG.	±1°	APP:Kent
		06/05/11
DWG NO:	SCALE: 1:1	SHEET: 1 of 1
REV: AO		

P.C.B LAYOUT  
\*\*\*\*\*