

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:







- 1.1 Insulator: PA6T 15%G.F. UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze,t=0.25mm.
- 1.3 Shell: Copper alloy,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1.5 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 minute.
- 2.3 Contact resistance: 50 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min at DC 100V.
- 2.5 Total mating force: 4.5 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: Operating: -40°C~+85°C
Storage: -40°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10u",15u",30u".
- 3.2 Shell:Tin Plated.

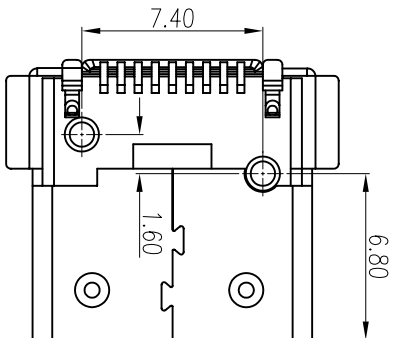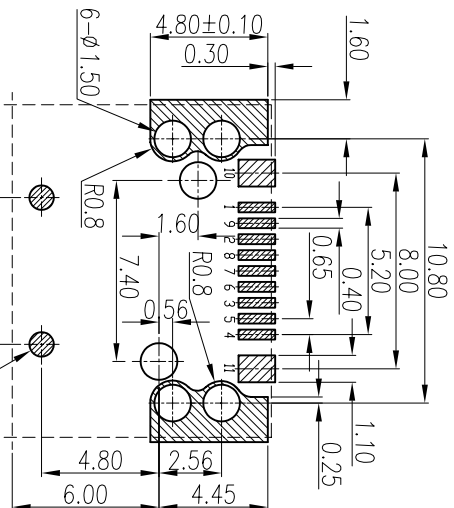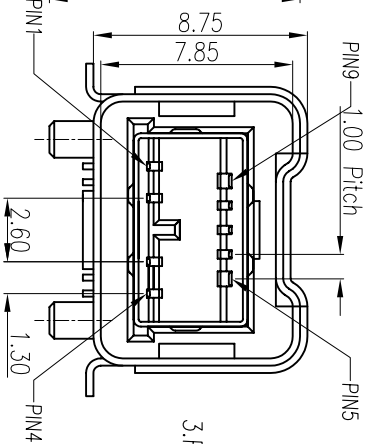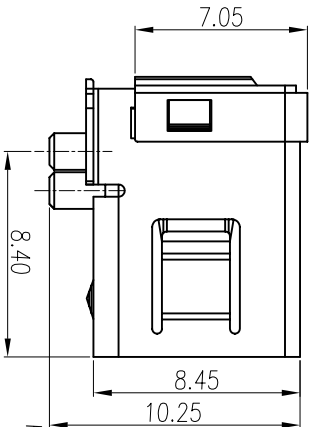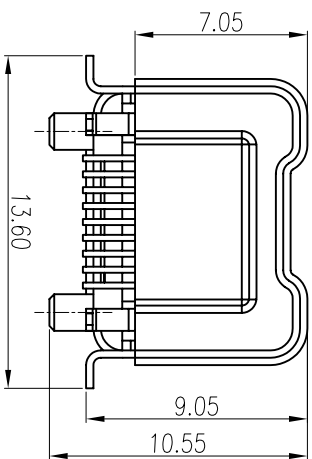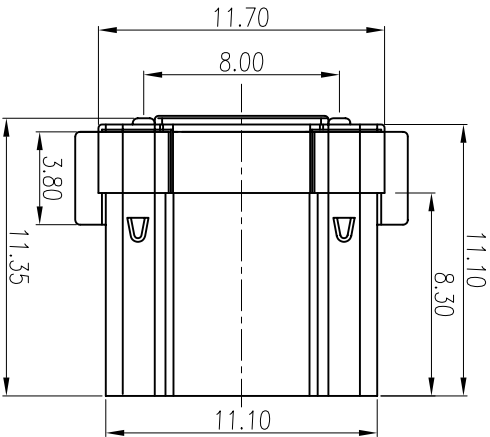

3	Shell	1	Copper alloy	T=0.30mm	Tin Plated
2	Contact	4	Phosphor bronze	T=0.25mm	Gold Flashed
1	Housing	1	PA6T&L.C.P	UL 94-V0	Black/Gray
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

HSI-CHIN ELECTRONICS CO.,LTD

PART NO:	MATERIAL:	PART NAME:
MODEL NO:	FINSH:	IEEE 1394 9PIN(F) B TYPE S.M.T
UNIT: mm	SIZE: A4	COLOR:
TOLERANCE UNSPECIFIED		
.x	±0.2	DR: 李霞 06/05/11
.xx	±0.10	CHK: Kevin 06/05/11
.xxx	±0.05	DWG NO: S/A-353
ANG.	±1°	APP: Kent 06/05/11
SCALE: 1:1		SHEET: 1 of 1