

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
1.2 Contact: Brass,t=0.30mm.

2.Specification:


- 2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
2.5 Total mating force: 4.0 Kgf Max.
2.6 Total unmating force: 0.5 Kgf Min.
2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".

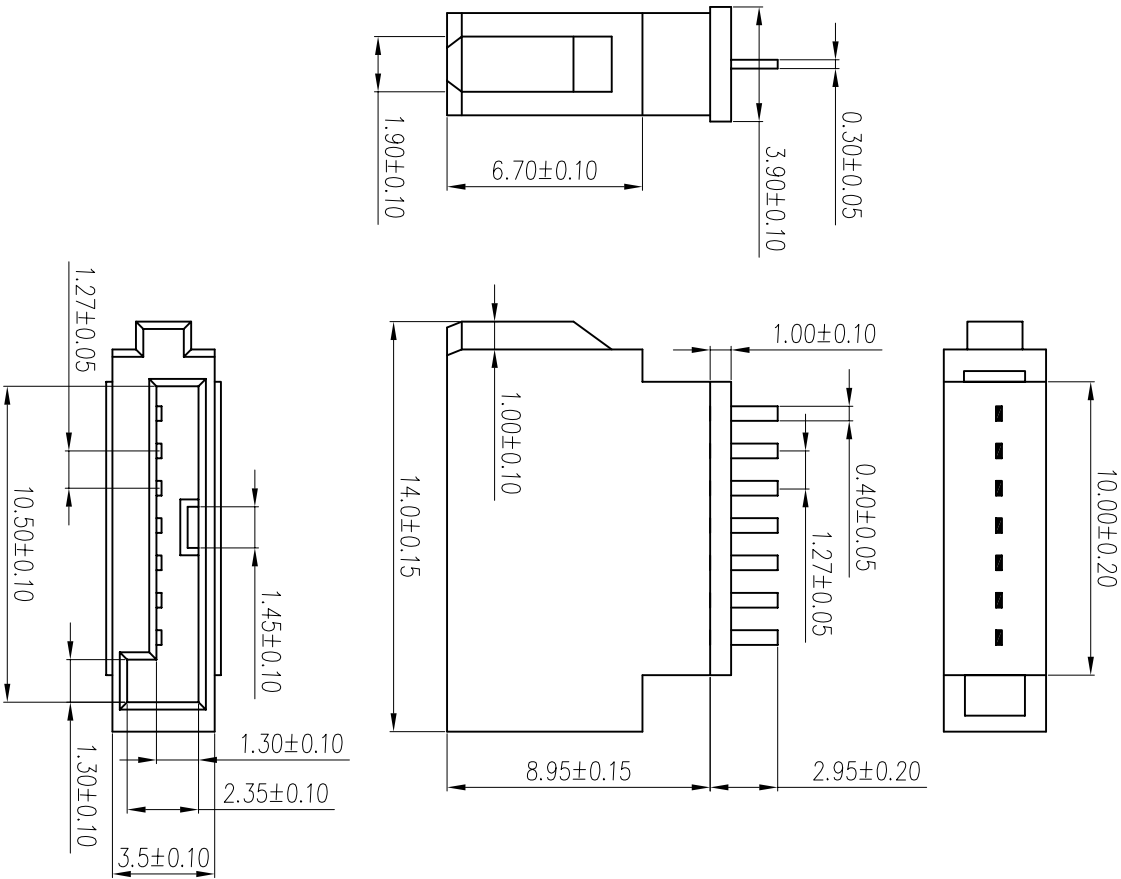

3	Hood	1	P.B.T	UL 94-V0	Black
2	Contact	7	Brass	T=0.30mm	Gold Flashed
1	Housing	1	P.B.T or L.C.P	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:		<div> HSI-CHIN ELECTRONICS CO.,LTD</div>
MODEL NO:		FINISH:		
UNIT: mm	SIZE: A4	COLOR:		
TOLERANCE UNSPECIFIED		PART NAME:		
.x ±0.3		DR: 段林麗 06/03/03		
.xx ±0.20		CHK: Song 06/03/03		
.xxx ±0.100		APP: Kent 06/03/03		
ANG. ±1°		SCALE: 4:1		
		SHEET: 1 of 1		
		REV: A0		