

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:

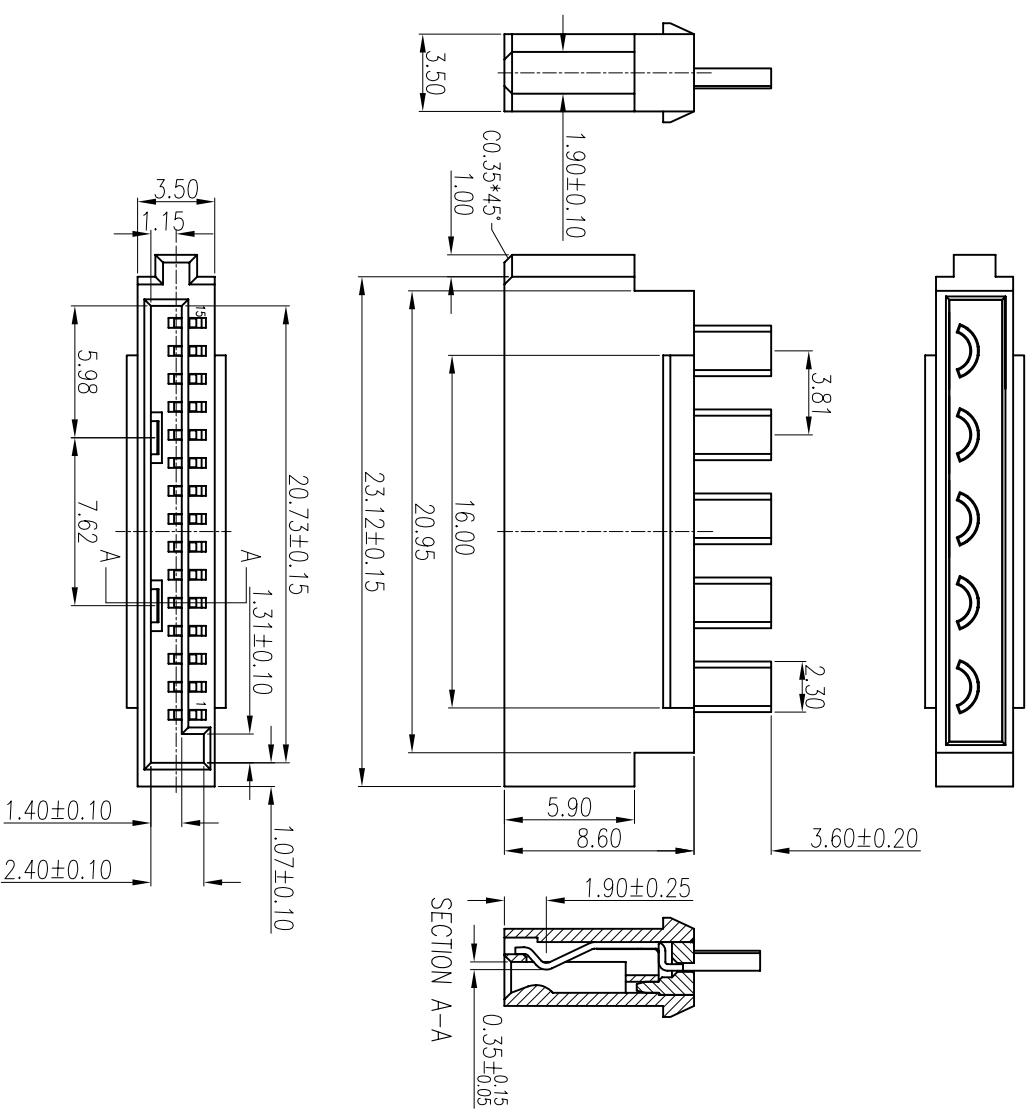
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.30mm.

2.Specification:



- 2.1 Current rating: 1.0 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55°C~+85°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".



3	Hood	1	P.B.T	UL 94-V0	Black
2	Contact	15	Brass	T=0.30mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black

PART NO:		MATERIAL:		<div> HSI-CHIN ELECTRONICS CO.,LTD</div>			
MODEL NO:		FINSH:					
UNIT: mm	SIZE: A4	COLOR:					
TOLERANCE UNSPECIFIED		DR:段林麗 06/04/26					
.x	±0.30	CHK:Song 06/04/26		PART NAME: SERIAL ATA-15PIN(F)無彈片			
.xx	±0.20	DWG NO: S/A-358-01					
.xxx	±0.10	REV: A0					
ANG. ±1°							
APP: Kent 06/04/26		SCALE: 3:1		SHEET: 1 of 1		<div></div>	

PART NAME:
SERIAL ATA-15PIN(F)無彈片