

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

Note:

1.Material:

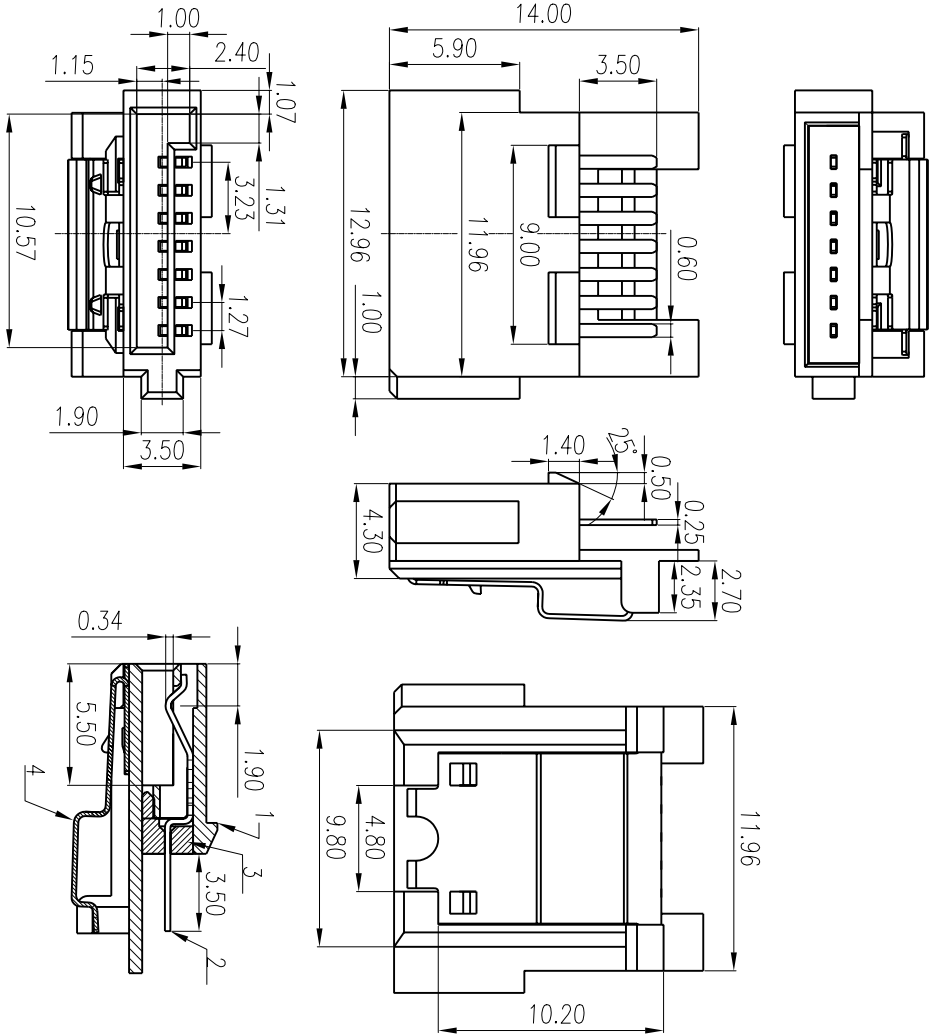
- 1.1 Insulator: P.B.T 30% G/F UL 94-V0 rated.
- 1.2 Contact:Brass t=0.25mm.
- 1.3 SPRING: SUS,t=0.20mm.

2.Specification:



- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min at DC 500V.
- 2.5 Total mating force: 1.5 Kgf Max.
- 2.6 Total unmating force: 0.2 Kgf Min.
- 2.7 Temperature range: -55℃~+105℃

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".



No.	Name	Q'ty	Material	Remarks & Thickness	Finish
3	Spring	1	Stainless	T=0.20mm	N/A
3	Hood	1	P.B.T	UL 94-V0	Black
2	Contact	7	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black

PART NO:		MATERIAL:		<div>HSI-CHIN ELECTRONICS CO.,LTD</div>			
MODEL NO:		FINSH:					
UNIT:	mm	SIZE:	A4	COLOR:	<div>PART NAME:</div> <div>SATA-7PIN(F) SOLDER 加平面彈片</div> <div>DWG NO:</div> <div>SCALE: 1:1</div> <div>SHEET: 1 of 1</div> <div>REV: AO</div> <div></div>		
TOLERANCE UNSPECIFIED							
.x ±0.20							
.xx ±0.10							
.xxx ±0.05							
ANG. ±1°							