

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REWSER	APPD

Note:

1.Material:





- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.30mm.
- 1.3 Cover: P.B.T UL 94-V0.
- 1.4 Sping: SUS 304,t=0.20mm.

2.Specification:

- 2.1 Current rating: 1.0 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55℃~+85℃

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".

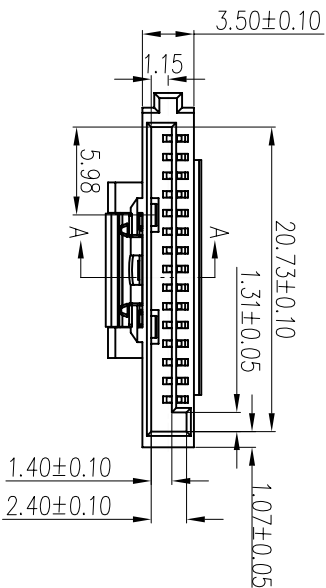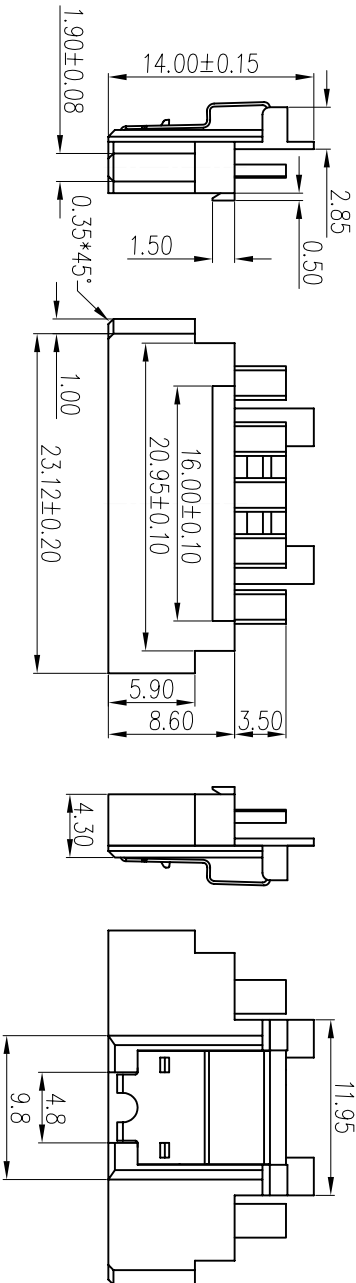

4	Spring	1	SUS 304	T=0.20mm	No Finish
3	Hood	1	P.B.T	UL 94-V0	Black
2	Contact	15	Brass	T=0.30mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

**HSI-CHIN ELECTRONICS CO.,LTD**

PART NO:	MATERIAL:				
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:			
TOLERANCE UNSPECIFIED		DR:段林耀 06/04/30	PART NAME: SATA-15PIN(F) SOLDER 加平面彈片		
.X	±0.2	CHK: Kevin 06/04/30	DWG NO:	S/A-358-02	REV: A0
.xx	±0.10	APP: Kent 06/04/30	SCALE: 2:1	SHEET: 1 of 1	
.xxx	±0.05				
ANG.	±1°				