



ROHS Compliant



Note:

Specification:




1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

6	8.0 Nut	2	Brass	H4.75*8.0	80~120u"Nickel Plated
5	3B Nut	2	Brass	H4.75*4.75	80~120u"Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80~120u"Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80~120u"Nickel Plated
2	Contact	9	Brass	T=0.20mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min.
1	Back Housing	1	PA66	UL 94-V0	Black/Blue/White
	Front Housing	1	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:		 HSI-CHIN ELECTRONICS CO.,LTD	
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 段林麗 '06/04/05		D-SUB CRIMP 9PIN(M)(附端子)	
.x ±0.30		CHK: Song '06/04/05		DWG NO: S/A-116	REV: AO
.xx ±0.20		APP: Kent '06/04/05		SCALE: 1:1	SHEET: 1 of 1
.xxx ±0.10					
ANG. ±1°					

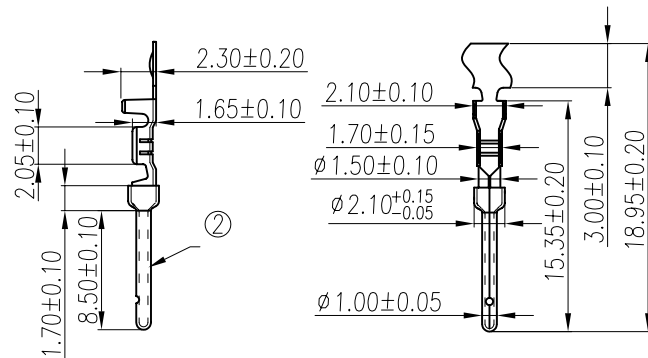

1.0 打端式公端
SCALE 2:1

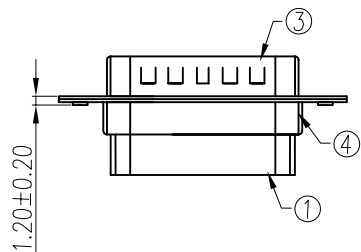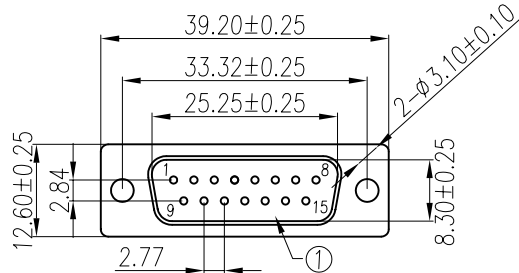

A	前鉗型(不通孔)	B	后鉗型(通孔)



ROHS Compliant



Note:

Specification:



- Current rating: 1 A Max.
- Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- Contact resistance: 30 mΩ Max.
- Insulation resistance: 1000 MΩ Min at DC 500V.
- Temperature range: -55°C~+105°C



6	8.0 Nut	2	Brass	H4.75*8.0	80~120u"Nickel Plated
5	3B Nut	2	Brass	H4.75*4.75	80~120u"Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80~120u"Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80~120u"Nickel Plated
2	Contact	15	Brass	T=0.20mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min.
1	Back Housing	1	PA66	UL 94-V0	Black/Blue/White
	Front Housing	1	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:		 HSI-CHIN ELECTRONICS CO.,LTD	
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:	PART NAME: D-SUB CRIMP 15PIN(M)(附端子)		
TOLERANCE UNSPECIFIED		DR: 段林麗 '06/04/05			
.x ±0.30		CHK: Song '06/04/05	DWG NO: S/A-117		REV: AO
.xx ±0.20		APP: Kent '06/04/05	SCALE: 1:1		SHEET: 1 of 1
.xxx ±0.10					
ANG. ±1°					

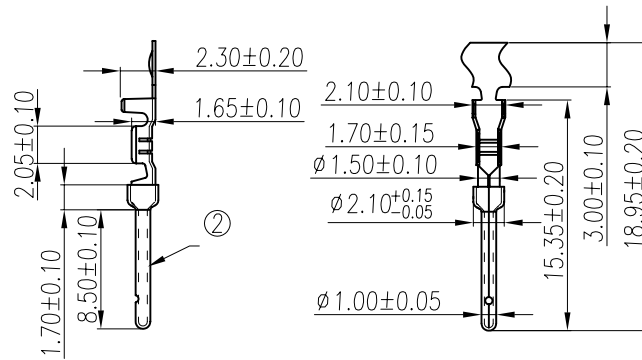

1.0 打端式公端
SCALE 2:1

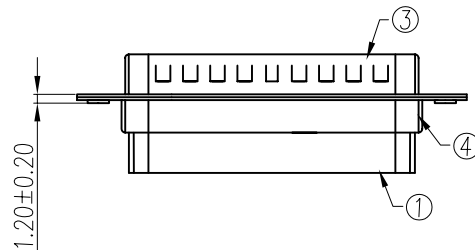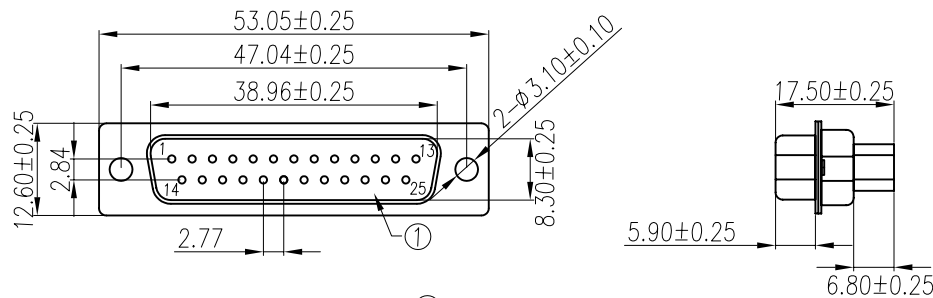

A	前鉗型(不通孔)	B	后鉗型(通孔)
			


ROHS Compliant

Note:

Specification:

- Current rating: 1 A Max.
- Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- Contact resistance: 30 mΩ Max.
- Insulation resistance: 1000 MΩ Min at DC 500V.
- Temperature range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

6	8.0 Nut	2	Brass	H4.75*8.0	80~120u"Nickel Plated
5	3B Nut	2	Brass	H4.75*4.75	80~120u"Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80~120u"Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80~120u"Nickel Plated
2	Contact	25	Brass	T=0.20mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min.
1	Back Housing	1	PA66	UL 94-V0	Black/Blue/White
	Front Housing	1	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:			
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 段林麗 '06/03/31		D-SUB CRIMP 25PIN(M)附端子	
.x	±0.30	CHK: Song '06/03/31		DWG NO:	S/A-117-01
.xx	±0.20			REV:	AO
.xxx	±0.10	APP: Kent '06/03/31		SCALE:	1:1
ANG.	±1°			SHEET:	1 of 1
				