


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

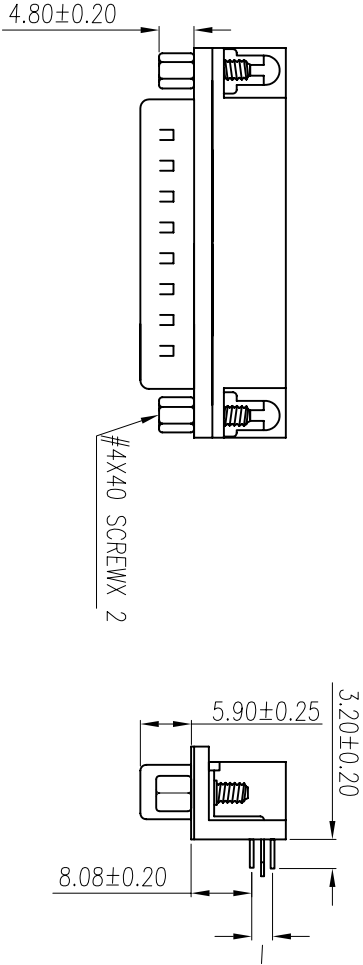

Note:

1.Material:



- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1U",3U",5U",10U",15U",30U";  
or All gold plated.
- 3.2 Shell: Nickel,tin,zinc plated

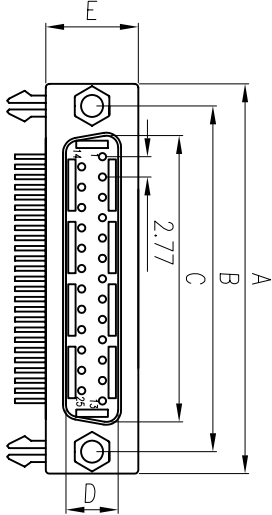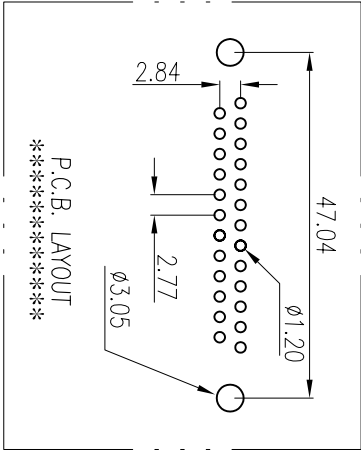

PART NO	A $\pm 0.25$	B $\pm 0.25$	C $\pm 0.25$	D $\pm 0.25$	E $\pm 0.25$	I $\pm 0.20$
DR-09P	30.80	25.00	16.92	8.30	12.60	2.84
DR-15P	39.20	33.32	25.25	8.30	12.60	2.84
DR-25P	53.05	47.04	38.96	8.30	12.60	2.84
DR-37P	69.40	63.50	55.42	8.30	12.60	2.84

PART NO:	MATERIAL:	HSI-CHIN ELECTRONICS CO.,LTD			
MODEL NO:	FINSH:				
UNIT: mm	SIZEA4	COLOR:	PART NAME:		
TOLERANCE UNSPECIFIED		DR: 段林麗	D-SUB RIGHT ANGLE P.C.B TYPE (M)鍍NUT		
.x ±0.3		CHK: Kevin	DWG NO:		
.xx ±0.20		APP: Kent	SCALE: 1:1		
.xxx ±0.100			SHEET: 1 of 1		
ANG. ±1°			REV: AO		