




REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact:Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

- 2.Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 5.0 Kgf Max.
- 2.6 Total unmating force: 2.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel,tin or gold plated

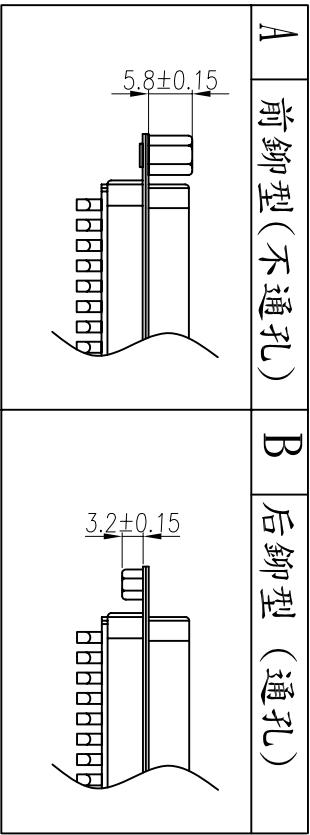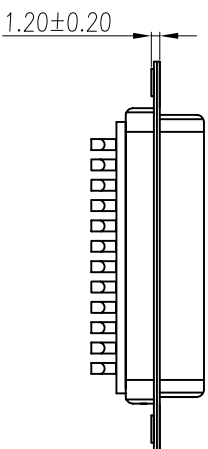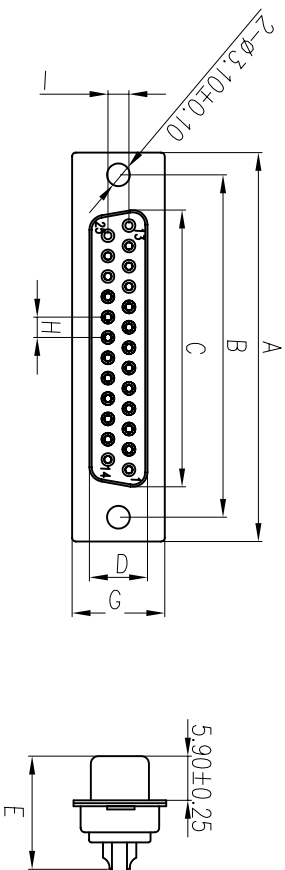

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20
DS-09S	30.80	25.00	16.30	8.30	15.00	12.60	2.77	2.84
DS-15S	39.20	33.32	24.70	8.30	15.00	12.60	2.77	2.84
DS-25S	53.05	47.04	38.38	8.30	15.00	12.60	2.77	2.84
DS-37S	69.40	63.50	54.80	8.30	15.00	12.60	2.77	2.84

PART NO:		MATERIAL:		<div>HSI-CHIN ELECTRONICS CO.,LTD</div>			
MODEL NO:		FINSH:					
UNIT: mm		SIZE: A4					
TOLERANCE UNSPECIFIED		COLOR:		PART NAME:			
.x ±0.3		DR: 段林麗 06/03/03		D-SUB SOLDER(F)			
.xx ±0.20		CHK: Kevin 06/03/03					
.xxx ±0.100		APP: Kent 06/03/03					
ANG. ±1°		SCALE: 1:1		SHEET: 1 of 1		REV: A0	
							