REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

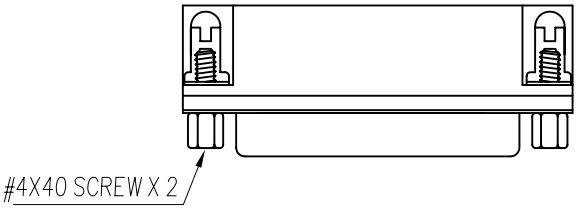

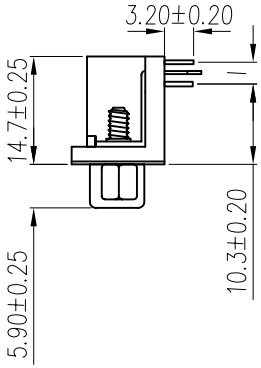

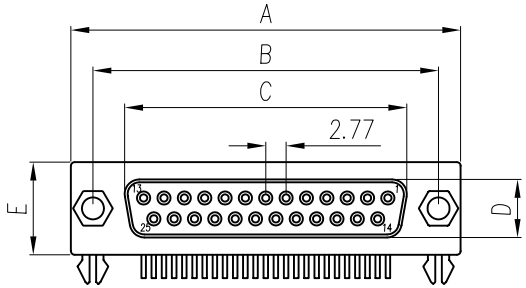

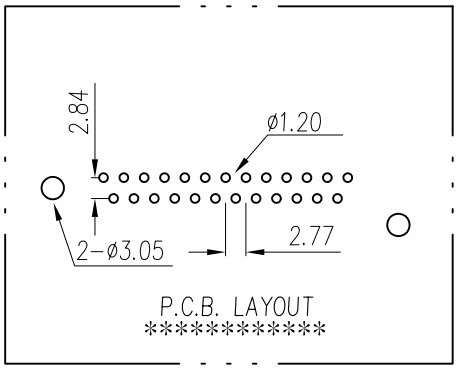

Note:

1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 2.0 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:
- 3.1 Contacts:Gold Flashed 1U'',3U'',5U'',10U'',15U'',30U''; or All gold plated.
- 3.2 Shell: Nickel,tin,zinc plated

No.	Name	Q'ty	Material	Remarks & Thickness	Finish
5	Sckew	2	Brass	4.75*11.80mm	Nickel Plated
4	"Z"type board-lock	2	Brass	T=0.50mm	Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.40mm	Nickel Plated
2	Contact	9~37	Brass	T=0.20mm	Gold Flashed,All Gold
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	I±0.20
DR-09S	30.80	25.00	16.30	7.90	12.60	2.84
DR-15S	39.20	33.32	24.70	7.90	12.60	2.84
DR-25S	53.05	47.04	38.40	7.90	12.60	2.84
DR-37S	69.40	63.50	54.80	7.90	12.60	2.84

PART NO:		MATERIAL:	HSI-CHIN ELECTRONICS CO.,LTD
MODEL NO:		FINSH:	
UNIT: mm	SIZE:A4	COLOR:	PART NAME: D-SUB RIGHT ANGLE P.C.B TYPE(F)鎖NUT 9.4
TOLERANCE UNSPECIFIED .x ±0.3 .xx ±0.20 .xxx ±0.100 ANG. ±1°		DR: 黃義強 '06/09/08	
		CHK: Kevin '06/09/08	DWG NO: REV: A0
		APP: Kent '06/09/08	SCALE: 1:1 SHEET: 1 of 1