

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:





- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 5.0 Kgf Max.
- 2.6 Total unmating force: 2.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:Gold flashed 1U",3U",5U",10U",15U",30U";
or All gold plated.
- 3.2 Shell: Nickel,tin,zinc plated

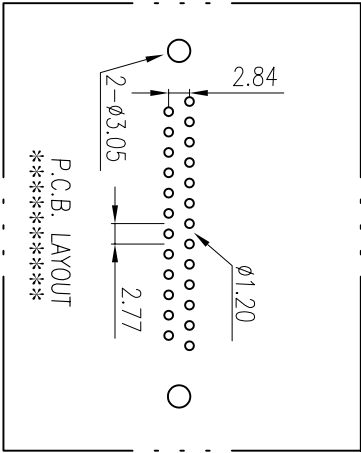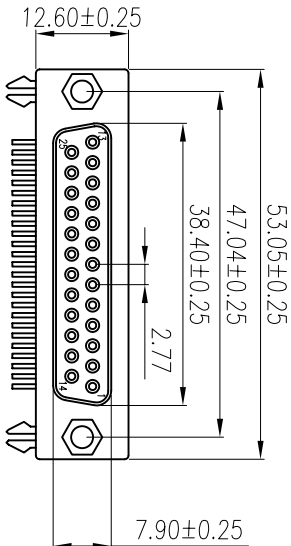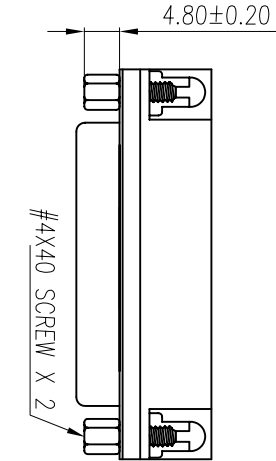

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	I±0.20
DR-09S	30.80	25.00	16.30	7.90	12.60	2.84
DR-15S	39.20	33.32	24.70	7.90	12.60	2.84
DR-25S	53.05	47.04	38.40	7.90	12.60	2.84
DR-37S	69.40	63.50	54.80	7.90	12.60	2.84

PART NO:	MATERIAL:	 D-SUB RIGHT ANGLE P.C.B TYPE(F)鍍NUT			
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4				
TOLERANCE UNSPECIFIED	DR: 段林麗 06/04/28	DWG NO:	REV: AO		
.x ±0.3	CHK:Kevin 06/04/28	SCALE: 1:1			
.xx ±0.20	APP:Kent 06/04/28	SHEET: 1 of 1			
.xxx ±0.100					
ANG. ±1°					