


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

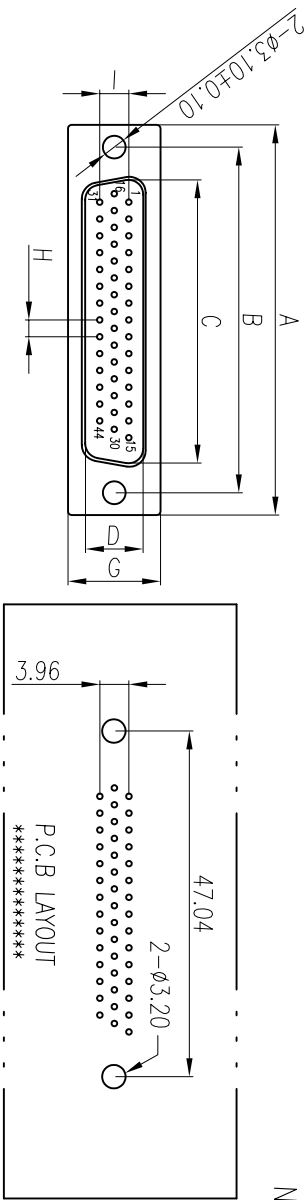

Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:




- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

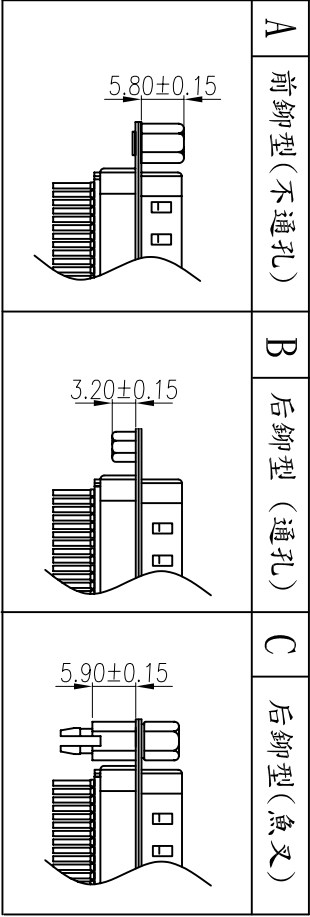- 3.1 Contacts:Gold flashed 1u",3u",5u",10u",15u",30u".
- 3.2 Shell: Nickel,tin or gold plated



PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20
HDIP-15P	30.80	25.00	16.92	8.30	17.00	12.60	2.29	3.96
HDIP-26P	39.20	33.32	25.25	8.30	17.00	12.60	2.29	3.96
HDIP-44P	53.05	47.04	38.96	8.30	17.00	12.60	2.29	3.96
HDIP-62P	69.40	63.50	55.42	8.30	17.00	12.60	2.41	3.96

PART NO:		MATERIAL:		<div> HSI-CHIN ELECTRONICS CO.,LTD</div>			
MODEL NO:		FINSH:					
UNIT: mm	SIZE: A4	COLOR:					
TOLERANCE UNSPECIFIED							
.x		±0.3		PART NAME: D-SUB HDD P.C.B SOLDER(M)			
.xx		±0.20					
.xxx		±0.100					
ANG.		±1°					
AP: Kent		06/04/21		DWG NO:		REV: AO	
SCALE: 1:1		SHEET: 1 of 1		<div></div>			