
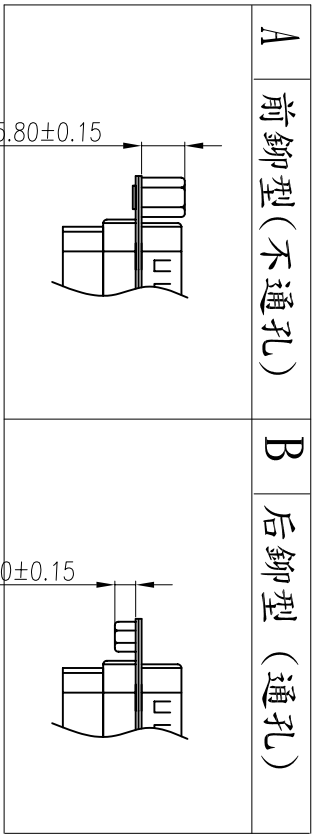




REV.	ECN NO	LOCATIONS	DESHDRIPTION	DATE	REVISER	APPD


- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
  - 1.2 Contact: Brass,t=0.20mm.
  - 1.3 Shell: Cold rolled steel,t=0.40mm.

- 2.Specification:
- 2.1 Current rating: 1 A Max.
  - 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
  - 2.3 Contact resistance: 30 mΩ Max.
  - 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
  - 2.5 Temperature range: -55°C~+105°C

- 3.Finishes:
- 3.1 contacts:Gold flashed 1u”3u”,5u”,10U”,15u”,30u”.
  - 3.2 Shell: Nickel,tin or gold plated

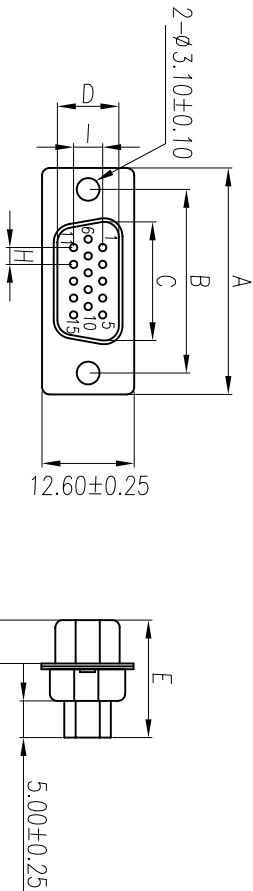

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20
HDC-15P	30.80	25.00	16.92	8.30	16.00	12.60	2.29	3.96
HDC-26P	39.20	33.32	25.25	8.30	16.00	12.60	2.29	3.96
HDC-44P	53.05	47.04	38.96	8.30	16.00	12.60	2.29	3.96
HDC-62P	69.40	63.50	55.42	8.30	16.00	12.60	2.29	3.96

PART NO:		MATERIAL:		<div>HSI-CHIN ELECTRONICS CO.,LTD</div>			
MODEL NO:		FINSH:					
UNIT: mm	SIZE: A4	COLOR:					
TOLERANCE UNSPECIFIED		DR: 段林麗 06/04/05		PART NAME:  D-SUB HDD HDCIMP(M)			
.x .xx .xxx ANG.	±0.3 ±0.20 ±0.100 ±1°	CHK: Kevin 06/04/05		DWG NO:		REV: AO	
APP: Kent 06/04/05		SCALE: 1:1		SHEET: 1 of 1		