

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:




- 1.1 Insulator: P.B.T UL 94-V0 rated.
1.2 Contact: Brass,t=0.20mm.
1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:


- 2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
2.5 Total mating force: 8.0 Kgf Max.
2.6 Total unmating force: 4.0 Kgf Min.
2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
3.2 Shell: Nickel,tin plated

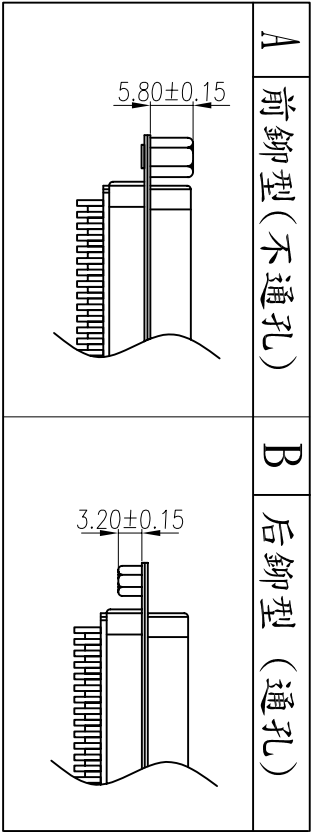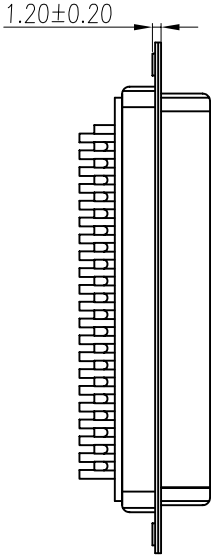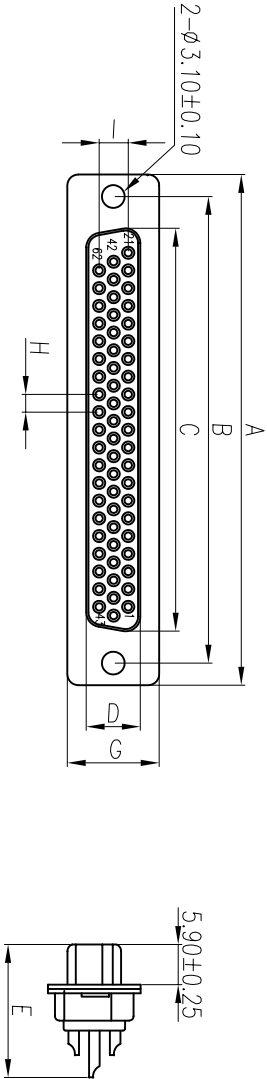

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20
HDD-15S	30.80	25.00	16.33	7.90	16.50	12.60	2.29	3.96
HDD-26S	39.20	33.32	24.66	7.90	16.50	12.60	2.29	3.96
HDD-44S	53.05	47.04	38.38	7.90	16.50	12.60	2.29	3.96
HDD-62S	69.40	63.50	54.84	7.90	16.50	12.60	2.41	3.96

PART NO:		MATERIAL:	
MODEL NO:		FINSH:	
UNIT: mm	SIZE: A4	COLOR:	
TOLERANCE UNSPECIFIED		PART NAME:	
.x	±0.3	<div> D-SUB HDD SOLDER(F)</div>	
.xx	±0.20		
.xxx	±0.100		
ANG.	±1°		
DR: 李霞			
CHK: Kevin		DWG NO:	
APP: Kent		SCALE: 1:1	
		SHEET: 1 of 1	
		REV: A0	