
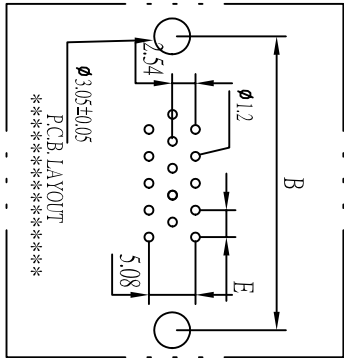


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

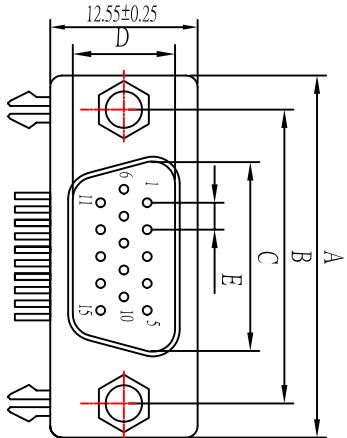


- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
 - 1.2 Contact: Copper alloy,t=0.20mm.
 - 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 8.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:All gold plated.
- 3.2 Shell: Nickel,tin,zinc plated

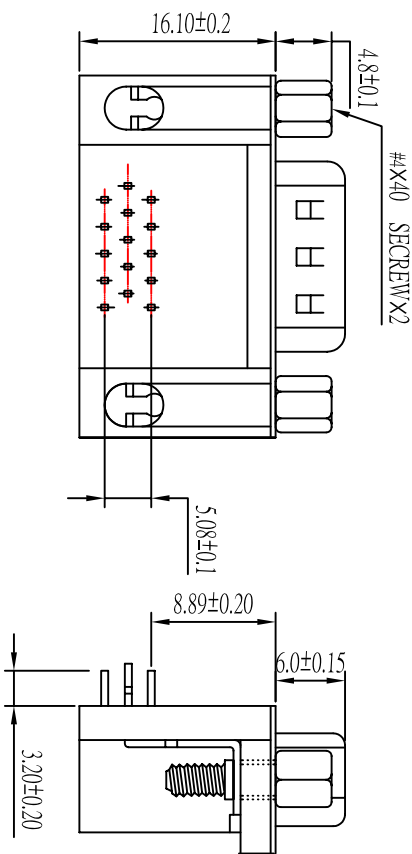

1	F Type	2	R Type	3	RF Type

PART NO.	A ± 0.2	B ± 0.2	C ± 0.2	D ± 0.2	E ± 0.1
HDR-15P	30.81	24.99	16.92	8.38	2.29
HDR-26P	39.25	33.32	25.25	8.38	2.29
HDR-44P	53.04	47.04	38.96	8.38	2.29
HDR-62P	69.32	63.50	55.42	8.38	2.41

5	Socket	2	Copper alloy	4.75*11.80mm	Nickel,Tin Plated
4	"Z" type board-lock	2	Copper alloy	T=0.50mm	Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.40mm	Nickel Plated
2	Contact	15-62	Copper alloy	T=0.20mm	Gold Flashed,All Gold
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/Black
No	Name	Qty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:	HSE HSI-CHIN ELECTRONICS CO.,LTD			
MODEL NO:	FINISH:				
UNIT:	SIZE:	COLOR:	PART NAME:		
mm	A4		HDD RIGHT ANGLE P.B.C TYPE(A)插鎖NUT		
TOLERANCE UNSPECIFIED		DR: <i>Chyhsuan</i> 1020617	DWG NO:	HC-028-01	REV: A0
X ±0.3	CHK: <i>Nick</i> 1020617	APP: <i>Stent</i> 1020617	SCALE: 2:1	SHEET: 1 of 1	
.XX ±0.20					
.XXX ±0.100					
ANG. ±1°					