

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:




- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:


- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 7.0 Kgf Max.
- 2.6 Total unmating force: 3.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel,tin plated

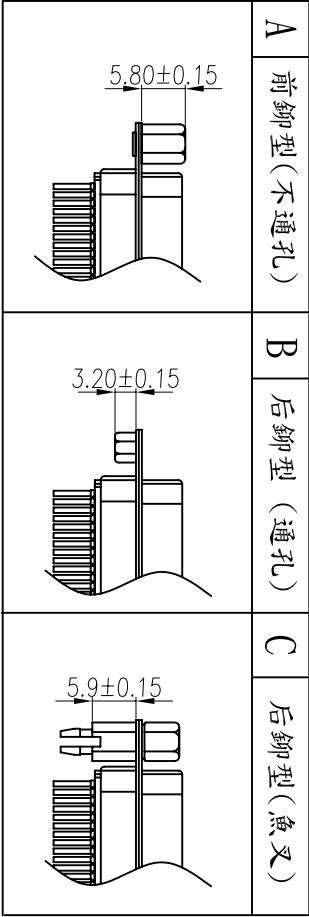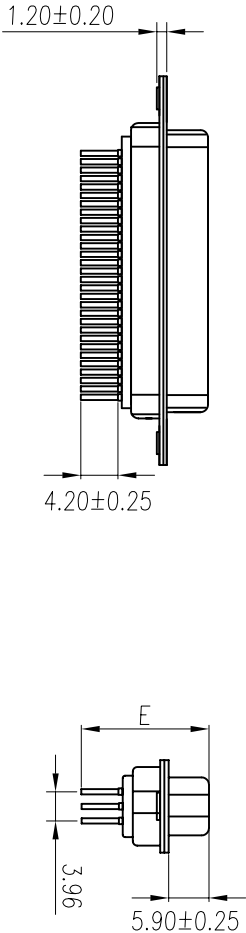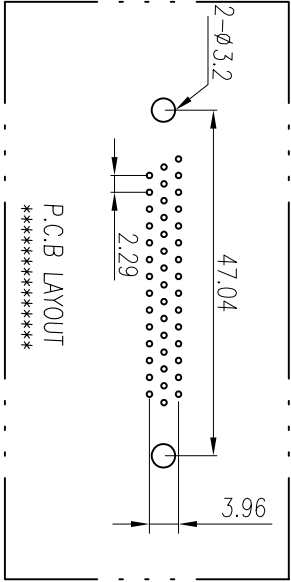

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20
HDIP-15S	30.80	25.00	16.33	7.90	16.00	12.60	2.29	3.96
HDIP-26S	39.20	33.32	24.66	7.90	16.00	12.60	2.29	3.96
HDIP-44S	53.05	47.04	38.38	7.90	16.00	12.60	2.29	3.96
HDIP-62S	69.40	63.50	54.84	7.90	16.00	12.60	2.41	3.96

PART NO:		MATERIAL:		<div></div>				
MODEL NO:		FINSH:						
UNIT: mm	SIZE: A4	COLOR:						
TOLERANCE UNSPECIFIED								
.x .xx .xxx ANG.		±0.3 ±0.20 ±0.100 ±1°	DR: 李霞 CHK: Kevin APP: Kent	06/04/22 06/04/22 06/04/22	DWG NO:		REV: A0	
				PART NAME: D-SUB HDD DIP P.C.B(F)				
				SCALE: 1:1		SHEET: 1 of 1		