



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact(A): Brass,t=0.20mm.
- 1.3 Contact(B): Brass,ø1.80mm or ø3.0mm.
- 1.4 Shell: Cold rolled steel,t=0.40mm.

- 2.Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
or All Gold Plated.
- 3.2 Shell:Nickel or Tin Plated.

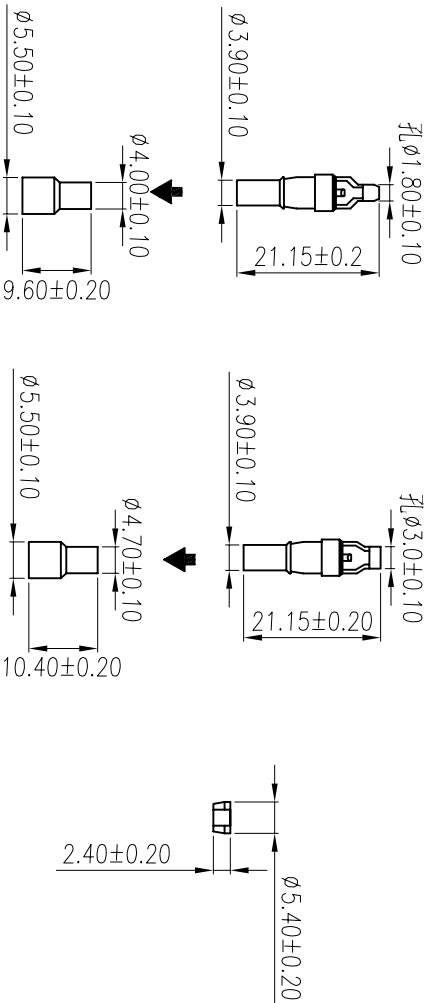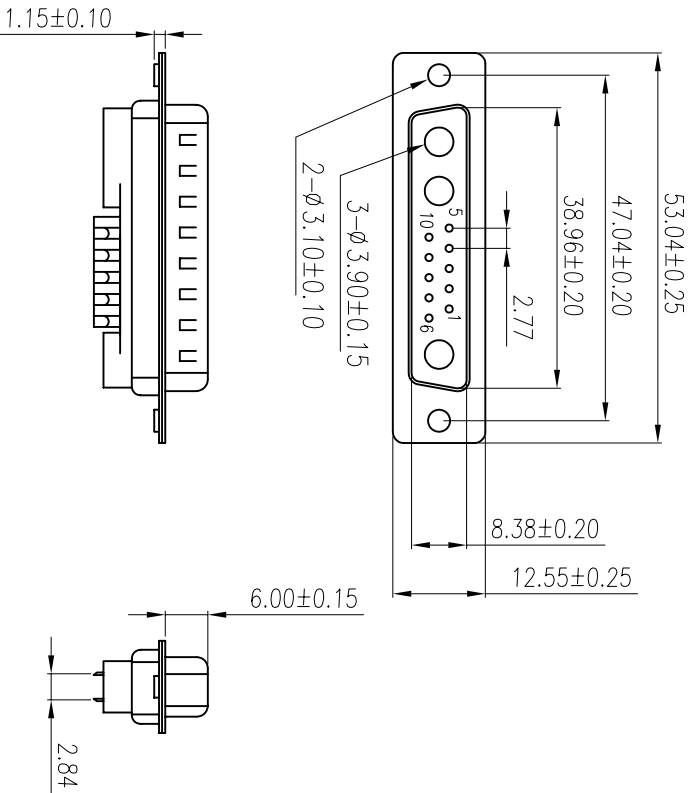

5	Back-shell	1	Cold rolled steel	T=0.40mm	Tin Plated
4	Front-shell	1	Cold rolled steel	T=0.40mm	Nickel Plated
3	Contact(B)	3	Brass	ø1.8 or ø3.0	Gold Plated
2	Contact(A)	10	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Blue
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:	HSI-CHIN ELECTRONICS CO.,LTD			
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME:	D-SUB COAXIAL-13W3 TYPE(M)	
TOLERANCE UNSPECIFIED		DR: 黄義強	06/03/19	DWG NO:	S/A-372
.x	±0.3	CHK:Song	06/03/19	SCALE:	1:1
.xx	±0.20	AP:Kent	06/03/19	SHEET:	1 of 1
.xxx	±0.100			REV:	A0
ANG.	±1°				