



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REWSR	APPD

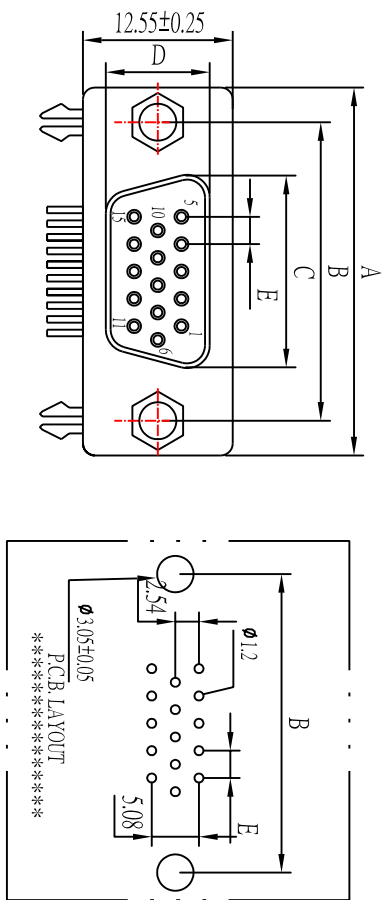

Note:
1.Material:
1.1 Insulator: P.B.T UL 94-V0 rated.
1.2 Contact: Copper alloy,t=0.20mm.
1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:
2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
2.5 Total mating force: 8.0 Kgf Max.
2.6 Total unmating force: 1.5 Kgf Min.
2.7 Temperature range: -55C~+105C

3.Finishes:
3.1 contacts:All gold plated.
3.2 Shell: Nickel,lin,zinc plated

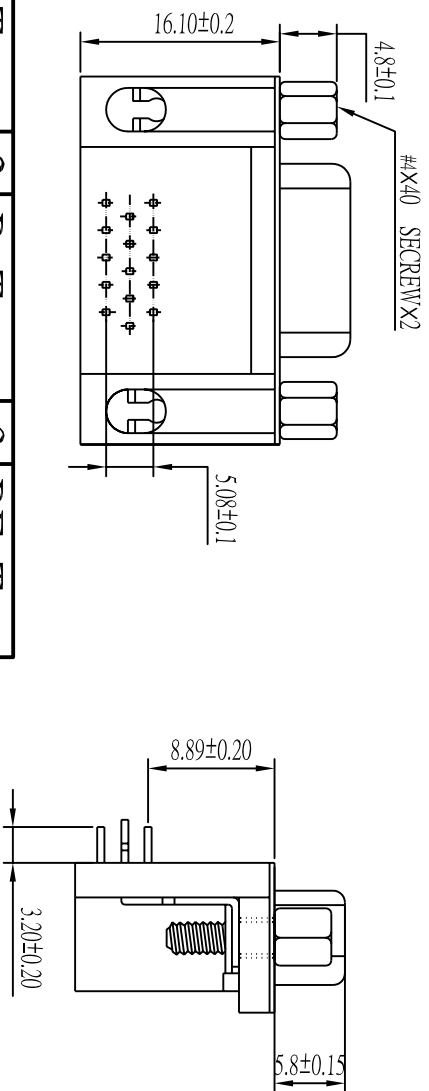

1	F Type	2	R Type	3	RF Type

5	Screw	2	Copper alloy	4.75*1.80mm	Nickel,Tin Plated
4	"Z" type board-lock	2	Copper alloy	T=0.50mm	Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.40mm	Nickel Plated
2	Contact	15~62	Copper alloy	T=0.20mm	Gold Flashed,All Gold
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/Black
No.	Name	Qty	Material	Remarks & Thickness	Finish

PART NO.	A ± 0.2	B ± 0.2	C ± 0.2	D ± 0.2	E ± 0.1
HDR-15S	30.81	24.99	16.33	7.90	2.29
HDR-26S	39.25	33.32	24.66	7.90	2.29
HDR-44S	53.04	47.04	38.38	7.90	2.29
HDR-62S	69.32	63.50	54.84	7.90	2.41

PART NO:		MATERIAL:			
MODEL NO:		FINISH:			
UNIT: mm		SIZE: A4			
TOLERANCE UNSPECIFIED		COLOR:		PART NAME:	
.x ±0.3		DR: <i>Cyphus</i> 1020712		HDD RIGHT ANGLE P.B.C TYPE(F)插鎖NUT	
.xx ±0.20		CHK: <i>Nick</i> 1020712		DWG NO: HC-029-01	
.xxx ±0.100		APP: <i>Nord</i> 1020712		SCALE: 2:1	
ANG. ±1°				SHEET: 1 of 1	