

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:



- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact(A): Brass,t=0.20mm.
- 1.3 Contact(B): Brass,ø1.80mm or ø3.0mm.
- 1.4 Shell: Cold rolled steel,t=0.40mm.

2.Specification:


- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 6.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u"  
or All Gold Plated.
- 3.2 Shell:Nickel or Tin Plated.

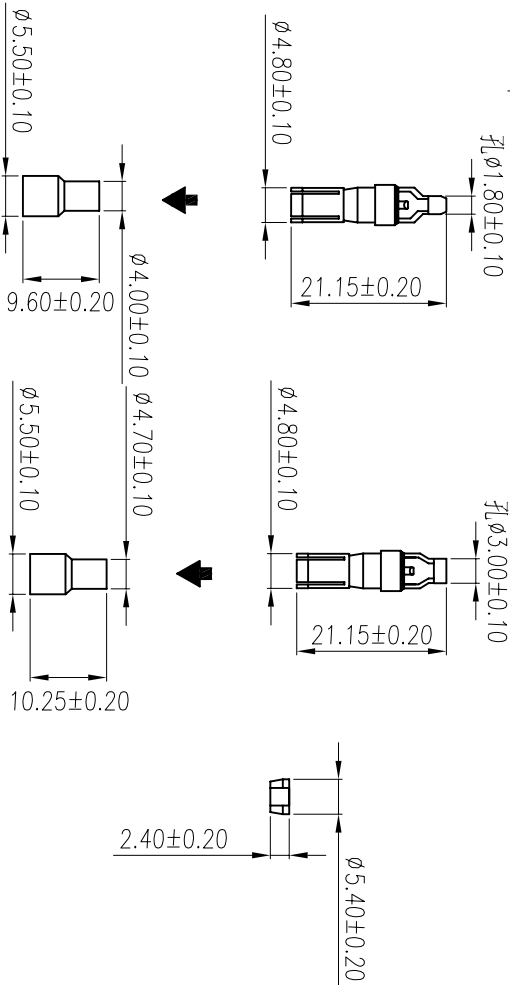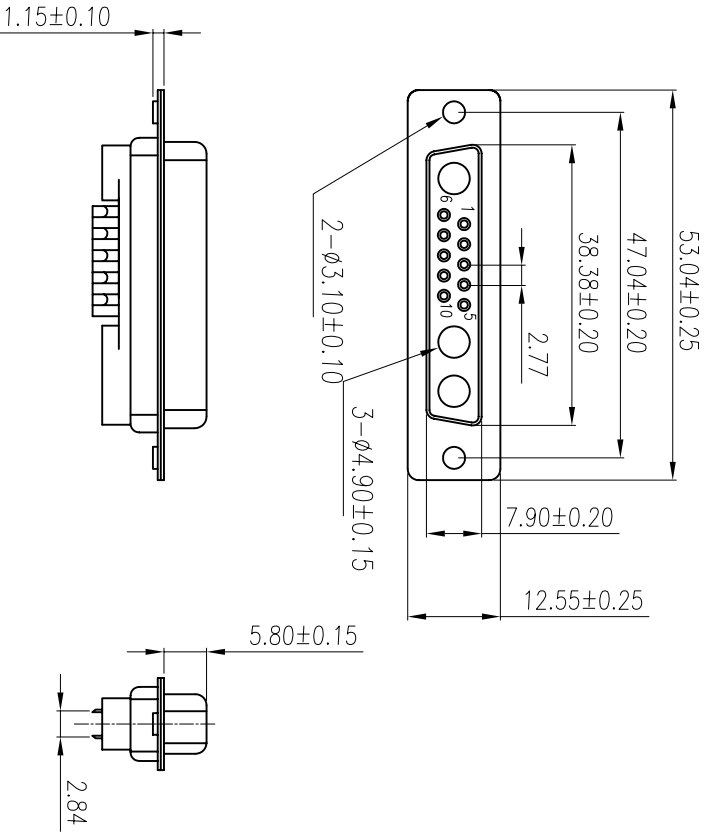

5	Back-shell	1	Cold rolled steel	T=0.40mm	Tin Plated
4	Front-shell	1	Cold rolled steel	T=0.40mm	Nickel Plated
3	Contact(B)	3	Brass	ø1.8 or ø3.0	Gold Plated
2	Contact(A)	10	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Blue

PART NO:		MATERIAL:		<div>HSI-CHIN ELECTRONICS CO.,LTD</div>				
MODEL NO:		FINISH:						
UNIT:	mm	SIZE:	A4	COLOR:	PART NAME:			
TOLERANCE UNSPECIFIED				DR: 黃義強 06/03/19				
.x				CHK: Song 06/03/19				
.xx				DWG NO: S/A-373				
.xxx				SCALE: 1:1				
ANG.				SHEET: 1 of 1				
				REV: A0				
				