




REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
 - 1.2 Contact: Brass,t=0.30mm.
 - 1.3 Front Shell: Cold rolled steelt=0.45mm.
 - 1.4 Spring: Stainless,t=0.9mm.

- 2.Specification:
- 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
 - 2.5 Total mating force: 6.5 Kgf Max.
 - 2.6 Total unmating force: 3.5 Kgf Min.
 - 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel,tin plated

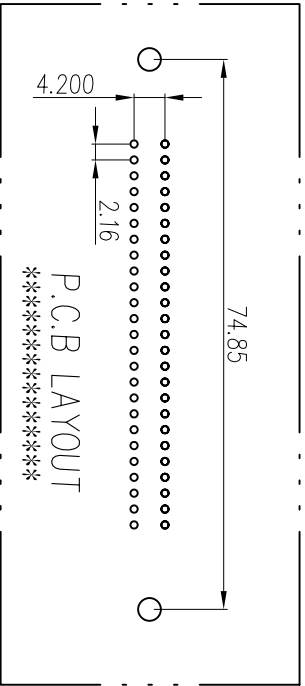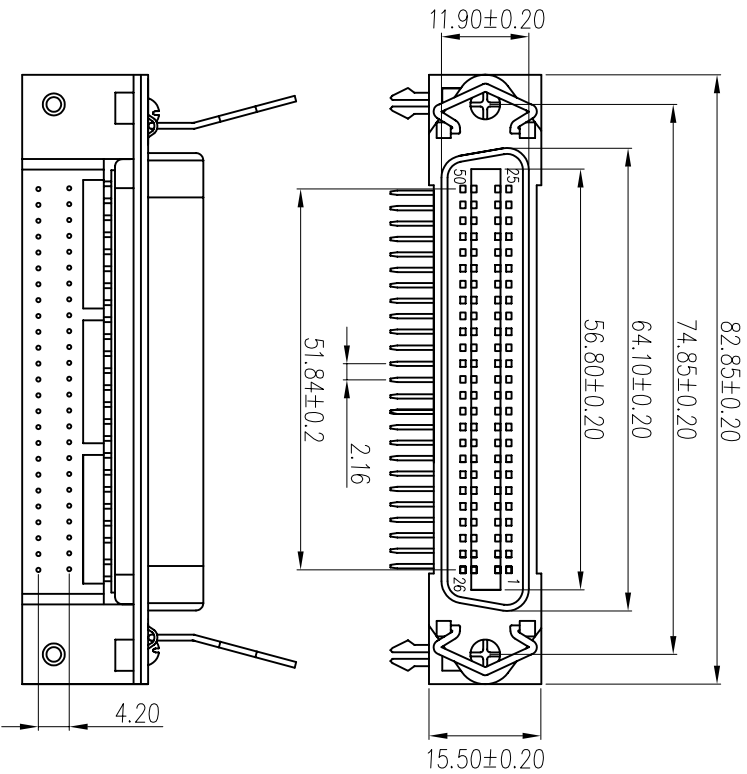

8	"Z" type board-lock	2	Bross	T=0.50mm	Tin Plated
7	Trangle	2	Cold Rolled Steel	T=0.60mm	Nickel Plated
6	Spring	2	Stainless	ø0.9	Nickel Plated
5	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
4	Contact	50	Bross	T=0.30mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/White/Blue
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:	<div> </div>			
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4				
TOLERANCE UNSPECIFIED	COLOR:	PART NAME:	CENTRONIC RIGHT ANGLE P.C.B 50PIN SOLDER (F)		
.x ±0.3	DR: 吳曉亮 06/09/04	DWG NO:	S/A-236	REV:	AO
.xx ±0.20	CHK: Kevin 06/09/04	SCALE:	1:1	SHEET:	1 of 1
.xxx ±0.100	APP: Kent 06/09/04				
ANG. ±1°					