

REV.	ECNNO	LOCATIONS	DESCRIPTION	DATE	REV/SE	APPD

Note:

1.Material:




- 1.1 Insulator: PA66 UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1.0 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55°C~+85°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".

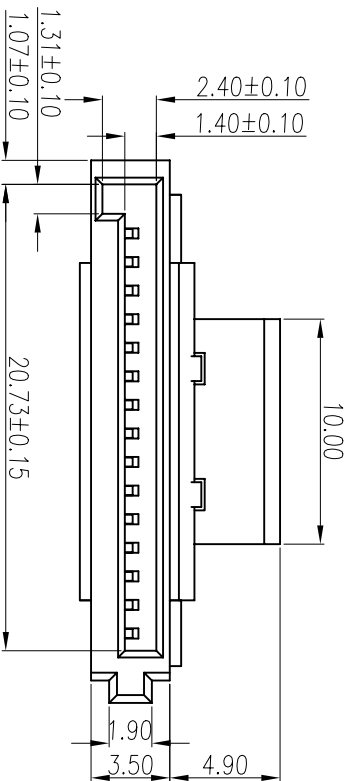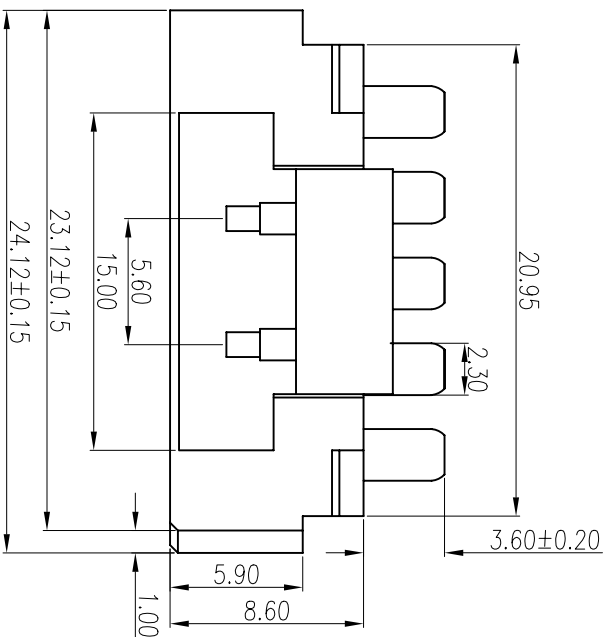

2	CONTACT	15	BRASS	T=0.3MM	GOLDFLASHED
1	HOUSING	1	PA66	UL94-V0	BLACK
NO.	NAME	Q'TY	MATERIAL	REMARKS&THICKNESS	FINISH

PRATNO:	MATERIAL:
MODELNO:	FINSH:
UNIT: MM	SIZE: A4
COLOR:	



PARTNAME:

TOLERANCEUNSPECIFIED	DR: 黄義雄 '06/10/04	DWGNO:	SERIAL ATA-15PIN(F)焊線式塑膠
.X-----±0.30	CHK: Kevin '06/10/04		
.XX-----±0.20	APP: Kent '06/10/04	SCALE: 3:1	SHEET: 10F1
ANG.-----±1°			

REV. A0

REV. A0
