REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

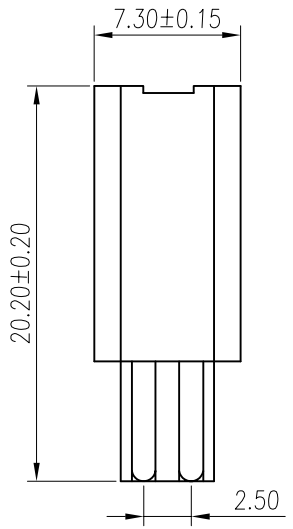

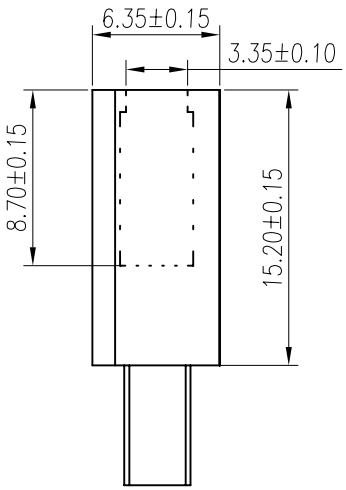

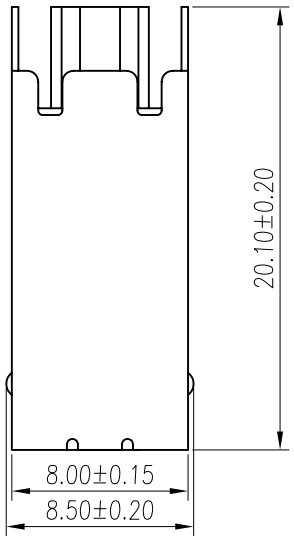

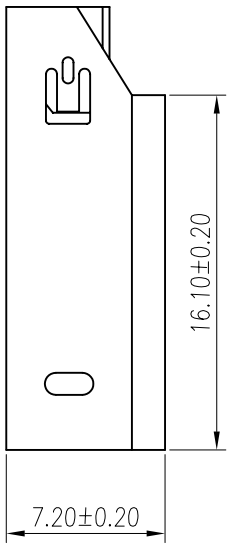

Note:

1.Material:

1.1 Insulator: P.B.T UL 94-V0 rated.
1.2 Contact: Brass,t=0.25mm.
1.3 Shell: Cold rolled steel,t=0.30mm.

2.Specification:

2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
2.5 Temperature range: -55°C~+105°C

3.Finishes:

3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
3.2 Shell: Nickel plated.

No.	Name	Q'ty	Material	Remarks & Thickness	Finish
3	Shell	1	Cold rolled steel	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory

PART NO:	MATERIAL:	HSI-CHIN ELECTRONICS CO.,LTD	
MODEL NO:	FINSH:		
UNIT: mm / SIZE: A4	COLOR:	PART NAME: USB-B TYPE SOLDER(M)短殼	
TOLERANCE UNSPECIFIED .x ±0.3 .xx ±0.20 .xxx ±0.100 ANG. ±1°	DR: 李霞 '06/05/09		
	CHK: Kevin '06/05/09	DWG NO: S/A-309	REV: A0
	APP: Kent '06/05/09	SCALE: 3:1 / SHEET: 1 of 1	