
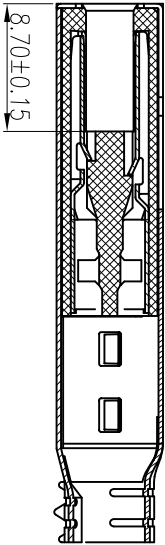

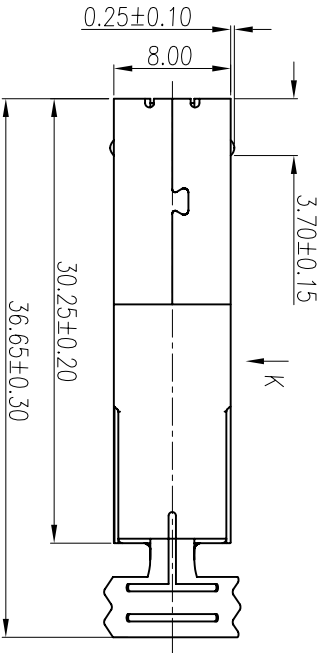


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

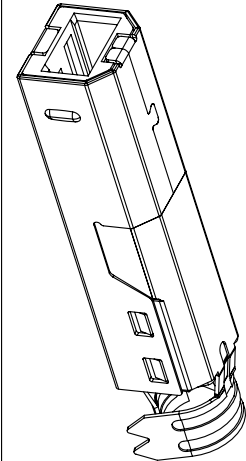

SECTION A-A



DETAIL K

4	Shell	2	Cold rolled steel	T=0.30mm	Cu:40u"min. 80~120u"Nickel Plated
3	Hight-Contact	2	Brass	T=0.25mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min.
2	Low-Contact	2	Brass	T=0.25mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min.
1	Housing	1	P.B.T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks&Thickness	Finish
PART NO:			MATERIAL:		
MODEL NO:			FINISH:		
UNIT: mm			COLOR:		
SIZE: A4			PART NAME:		
TOLERANCE UNSPECIFIED			USB-B(M)包線式		
.x ±0.3			DR:段林麗 06/07/04		
.xx ±0.20			CHK: Kevin 06/07/04		
.xxx ±0.100			APP: Kent 06/07/04		
ANG. ±1°			SCALE: 1:1		
			SHEET: 1 of 1		
			REV: A0		

HSI-CHIN ELECTRONICS CO.,LTD