
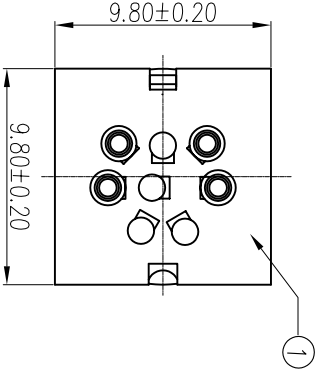
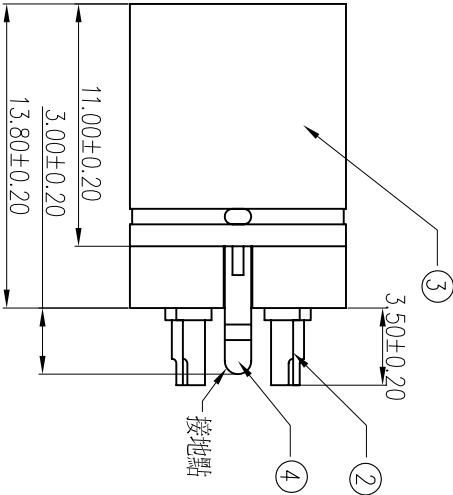
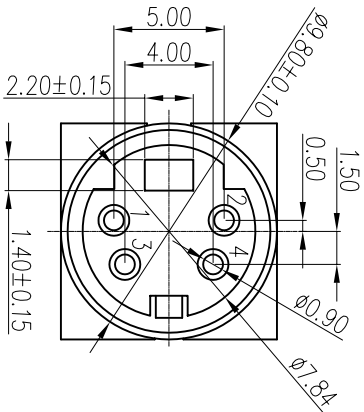


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Insertion force: 2.5 Kgf Max.
6. Extraction force: 0.5 Kgf Min.
5. Temperature range: -55°C~+105°C



4	Grounding Strip	1	Phosphor bronze	T=0.25mm	40~120u"Tin Plated
3	Shell	1	Brass	T=0.30mm	80~120u"Nickel Plated
2	Contact	4	Brass	T=0.20mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min.
1	Housing	1	P.B.T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:			MATERIAL:		
MODEL NO:			FINISH:		
UNIT:	mm	SIZE: A4	COLOR:		
TOLERANCE UNSPECIFIED			DR: 吳曉亮 '06/11/11		
.x ±0.3			DWG NO:		
.xx ±0.20			S/A-324		
.xxx ±0.100			REV: A0		
ANG. ±T			SCALE: 3:1		
APP: Kent '06/11/11			SHEET: 1 of 1		

HSI-CHIN ELECTRONICS CO.,LTD

MINI DIN-4PIN(F) 地線式(膠芯方形)