
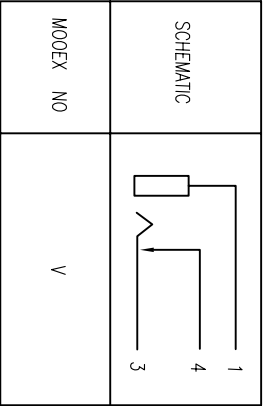
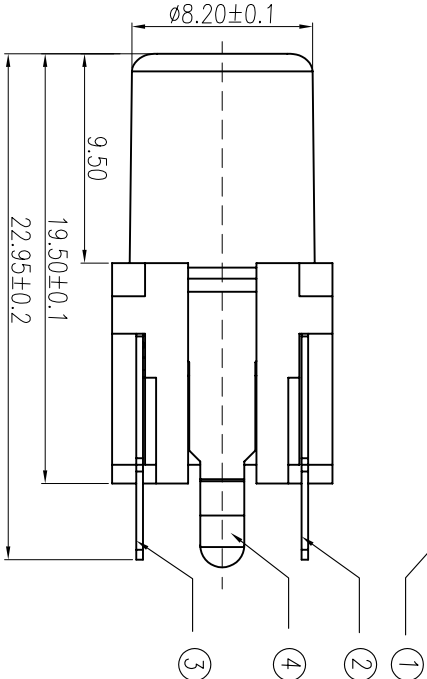
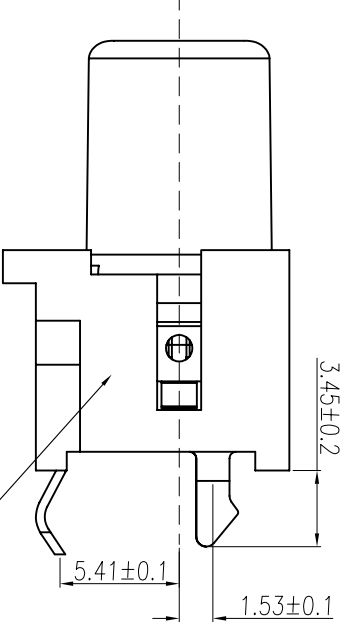
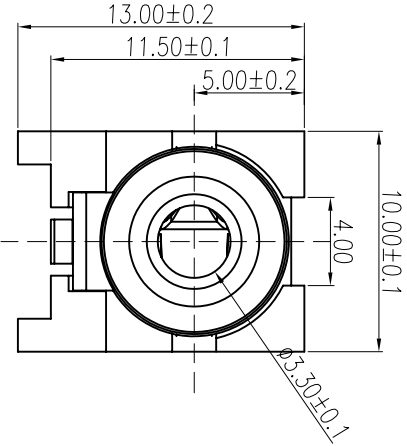
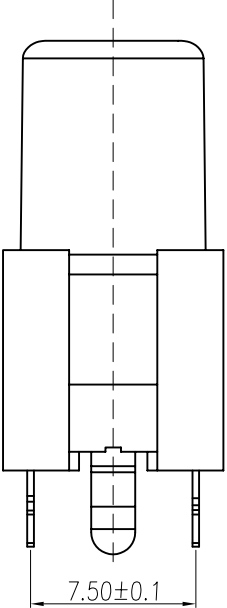


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- Specification:
1. Current rating: 1 A Max.
  2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
  3. Contact resistance: 30 mΩ Max.
  4. Insulation resistance: 100 MΩ Min at DC 500V.
  5. Temperature range: -40°C~+85°C
  6. Insertion Force: 3Kgf Max.
  7. Extraction Force: 0.4Kgf Min.

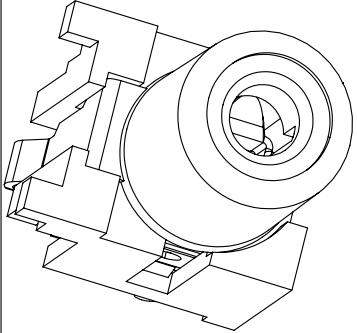

4	Earth Terminal	1	Brass	T=0.40mm	Nickel Plated
3	Contact	1	Phosphor Bronze	T=0.30mm	Silver Plated
2	Contact	1	Brass	T=0.30mm	Silver Plated
1	Housing	1	P.B.T	UL 94-V0	Red
No. Name Qty			Material	Remarks&Thickness	Finish

PART NO:			MATERIAL:		
MODEL NO:			FINISH:		
UNIT: mm			COLOR:		
SIZE: A4			PART NAME:		
TOLERANCE UNSPECIFIED			RED RCA JACK		
.x ±0.3			DWG NO:		
.xx ±0.20			CHK: Kevin 07/02/02		
.xxx ±0.100			DR: 高朋祥 07/02/02		
ANG. ±1°			APP: Kent 07/02/02		
			SCALE: 3:1		
			SHEET: 1 of 1		
			REV: A0		

**HSI-CHIN** ELECTRONICS CO.,LTD