

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Brass,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 5.0 Kgf Max.
- 2.6 Total unmating force: 2.0 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel plated

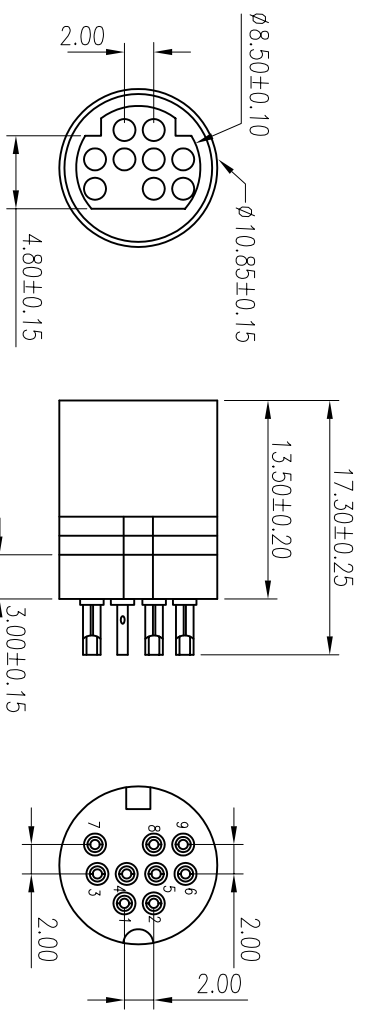

No.	Name	Qty	Material	Remarks & Thickness	Finish
3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	9	Brass	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Green/Purple

PART NO:	MATERIAL:	
MODEL NO:	FINSH:	
UNIT: mm	SIZE: A4	
TOLERANCE UNSPECIFIED		
X	±0.3	
.xx	±0.20	
.xxx	±0.100	
ANG.	±1°	

DR: 黄义强 06/05/03	DWG NO:	PART NAME: MINI DIN SOLDER 9PIN TYPE(F)	
CHK: Kevin 06/05/03	SCALE: 2:1	S/A-243	REV: A0
APP: Kent 06/05/03	SHEET: 1 of 1		

SCALE: 2:1	SHEET: 1 of 1	REV: A0
------------	---------------	---------