


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

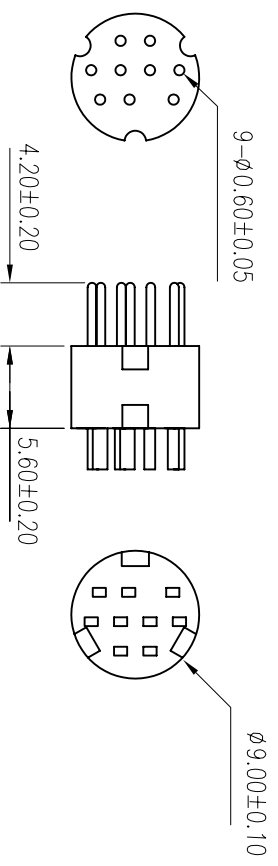

Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.60mm.
- 1.3 Shell: Brass,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total unmating force: 6.0 Kgf Max.
- 2.6 Total unmating force: 3.0 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed or Tin plated 1u",3u",5u",10u",15u",30u".
- 3.2 Shell: Nickel,Gold plated

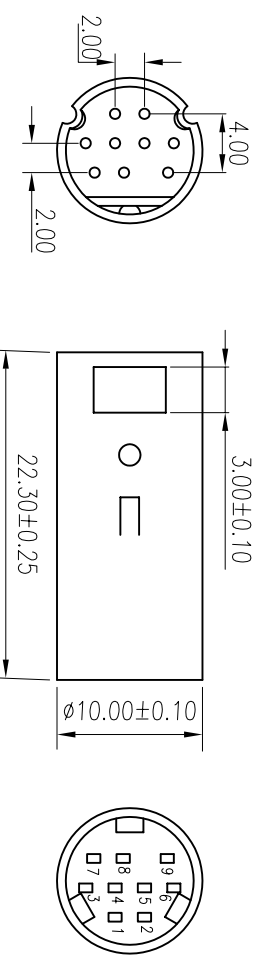

3	Shell	1	Brass	T=0.40mm	Nickel/Cold Plated
2	Contact	9	Brass	T=0.60mm	Gold Flashed/Tin Plated
1	Housing	1	P.B.T	UL 94-V0	Black/Green/Purple
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

HSI-CHIN ELECTRONICS CO.,LTD

PART NO:	MATERIAL:	PART NAME:
MODEL NO:	FINISH:	MINI DIN SOLDER 9PIN TYPE(M)長銅管
UNIT: mm	COLOR:	DWG NO: S/A-261
SIZE: A4		SCALE: 2:1

TOLERANCE UNSPECIFIED	DR: 吳曉亮 06/05/04	CHK: Kevin 06/05/04	APP: Kait 06/05/04	REV: A0
X ±0.3				
.xx ±0.20				
.xxx ±0.100				
ANG. ±1°				