


REV.	ECON NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

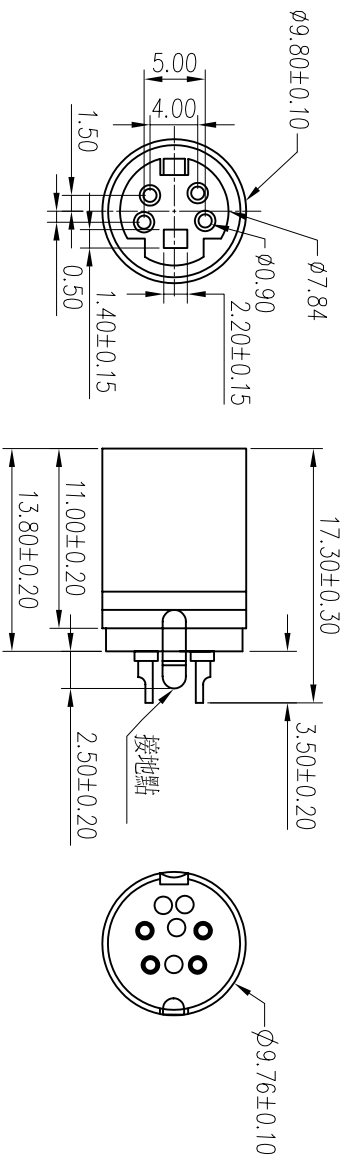

ORDER INFORMATION

- MD $\frac{-3}{1}$ $\frac{S}{2}$ $\frac{S}{3}$
1. MINI DIN: SOLDER TYPE
2. POSITION: 3,4,5,6,7,8
3. S: SOCKET

NO. OF CONTACT	PART NO.	MD-3S	MD-4S	MD-5S	MD-6S	MD-7S	MD-8S
3							

- Note:
1. Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass, t=0.20mm.
- 1.3 Shell: Brass, t=0.30mm.

2. Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 0.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3. Finishes:
- 3.1 contacts: Gold flashed 1u", 3u", 5u", 10u", 15u", 30u".
- 3.2 Shell: Nickel plated or Gold plated

No.	Name	Qty	Material	Remarks & Thickness	Finish
4	Grounding Strip	1	Phosphor bronze	T=0.20mm	Nickel Plated
3	Shell	1	Brass	T=0.30mm	Nickel/Gold Plated
2	Contact	3~8	Brass	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/green/Purple

PART NO:	MATERIAL:		
MODEL NO:	FINISH:		
UNIT: mm	SIZE: A4	COLOR:	PART NAME: MINI DIN SOLDER TYPE(F) 地線
TOLERANCE UNSPECIFIED			DWG NO: S/A-241
X ±0.3	DR: 李震	'06/04/21	SCALE: 2:1
.xx ±0.20	CHK: Kevin	'06/04/21	SHEET: 1 of 1
.xxx ±0.100	APP: Kent	'06/04/21	REV: A0
ANG. ±1°			