


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

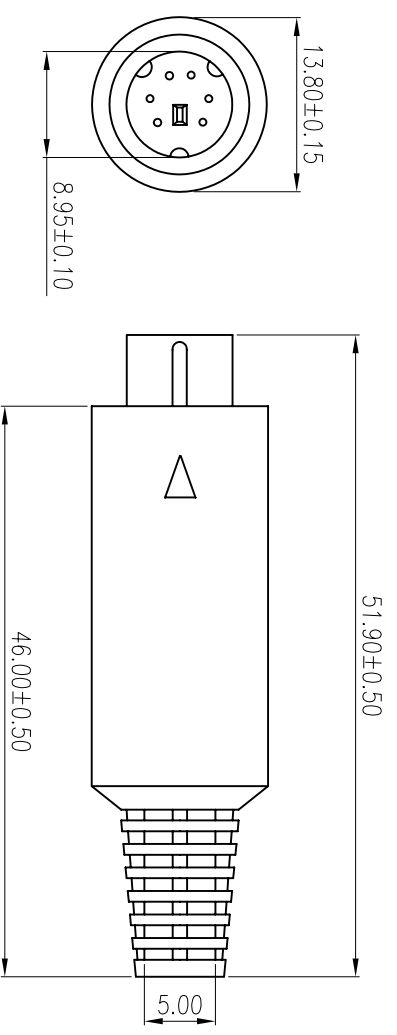

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.60mm.
- 1.3 Shell: Brass,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total unmating force: 6.0 Kgf Max.
- 2.6 Total unmating force: 3.0 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel plated

No.	Name	Q'ty	Material	Remarks & Thickness	Finish
3	Shell	1	Brass	T=0.40mm	Nickel Plated
2	Contact	3~8	Brass	T=0.60mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Green/Purple

NO.OF CONTACT	3	4	5	6	7	8
PART NO.	MD-3PL	MD-4PL	MD-5PL	MD-6PL	MD-7PL	MD-8PL
POSITION						

PART NO:		MATERIAL:		PART NAME:	
MODEL NO:		FINSH:		MINI DIN SOLDER TYPE(M)(装配式)	
UNIT: mm	SIZE: A4	COLOR:			
TOLERANCE UNSPECIFIED		DR: 吳曉亮 06/05/04			
.x	±0.3	CHK: Kevin 06/05/04			
.xx	±0.20	APP: Kent 06/05/04			
.xxx	±0.100	SCALE: 2:1			
ANG.	±1°	SHEET: 1 of 1			
		DWG NO: S/A-254		REV: A0	

