
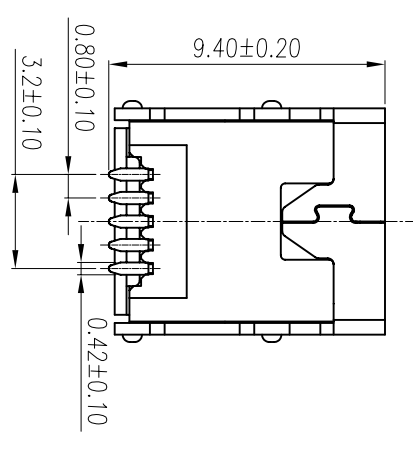
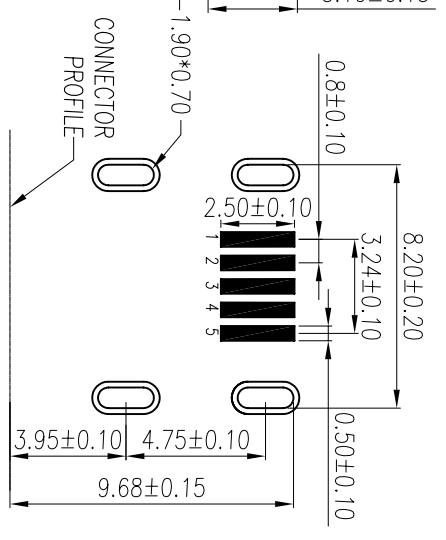
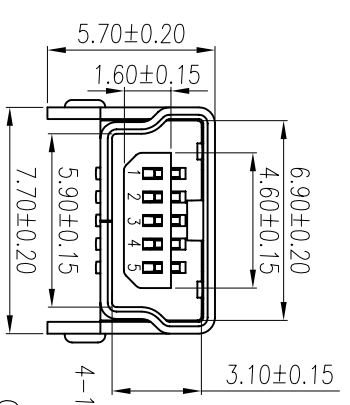
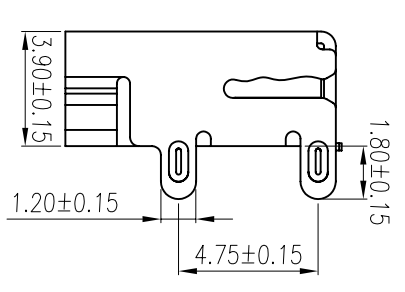


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

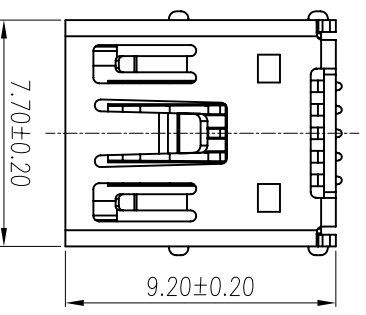

- Note:
- 1.Material:
- 1.1 Insulator: PA6T UL 94-V0 rated.
  - 1.2 Contact: Phosphor bronze,t=0.25mm.
  - 1.3 Shell: Phosphor bronze,t=0.40mm.

- 2.Specification:
- 2.1 Current rating: 1 A Max.
  - 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
  - 2.3 Contact resistance: 30 mΩ Max.
  - 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
  - 2.5 Total mating force: 29.4Newtons Max.
  - 2.6 Total unmating force: 4.9Newtons Min.
  - 2.7 Temperature range: -55°C~+105°C

- 3.Finishes:
- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
  - 3.2 shell:Nickel or Tin plated.

No.	Name	Q'ty	Material	Remarks & Thickness	Finish
3	Shell	1	Phosphor bronze	T=0.40mm	Nickel or Tin Plated
2	Contact	5	Phosphor bronze	T=0.25mm	Gold Flashed
1	Housing	1	PA6T	UL 94-V0	Black/Ivory



PART NO:	MATERIAL:	
MODEL NO:	FINSH:	
UNIT: mm	SIZE: A4	COLOR:
PART NAME: MINIUSB-5PIN(F) B TYPE S.M.直脚型		
TOLERANCE UNSPECIFIED		
X ±0.3	DR: 李霞	DWG NO: S/A-315
.xx ±0.20	CHK: Kevin	SCALE: 4:1
.xxx ±0.100	APP: Kent	SHEET: 1 of 1
ANG. ±.1	DATE: 06/04/20	REV: A0

