







REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Note:

Specification:

1. Current rating: 1A Max.
2. Dielectric withstanding voltage: 250V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Insertion force: 30 Newtons Max.
6. Extraction force: 5 Newtons Min.
7. Temperature range: -55°C~+105°C

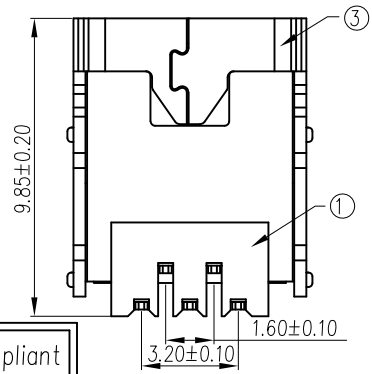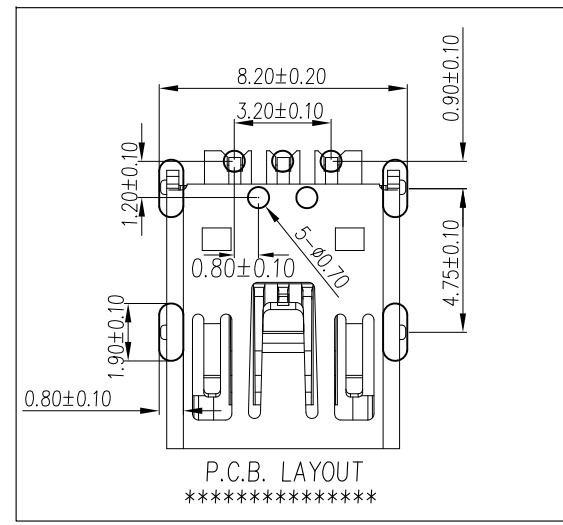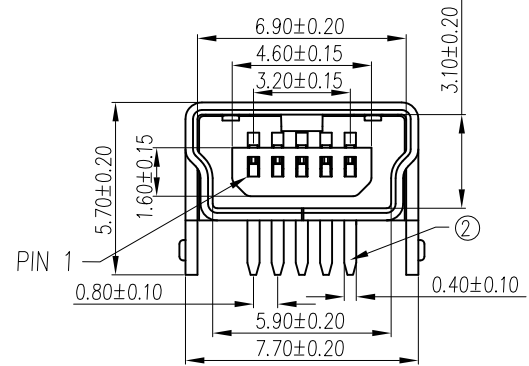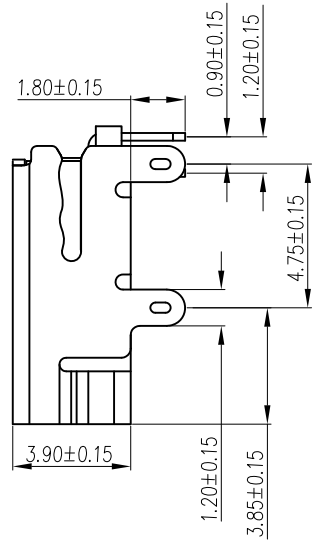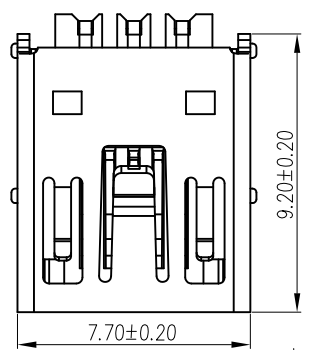

ROHS Compliant

No.	Name	Q'ty	Material	Remarks&Thickness	Finish
3	Shell	1	Brass	T=0.40mm	80u~120u Nickel Plated
2	Contact	4	Phosphor bronze	T=0.25mm	Contact area: 0.8~1.2u Gold Plated over 40u Nickel min Solder area: 80~120u Tin Plated over 40u Nicked Min.
1	Housing	1	PA6T	UL 94-V0	Black

PRAT NO:	MATERIAL:				
MODEL NO:	FINSH:				
UNIT: MM	SAZE: A4	COLOR:	PART NAME:		
TOLERANCE UNSPECIFIED		DR: 趙承寶 06/11/17	MINI USB-5PIN(F) B TYPE 90°X DIP(四腳)		
.X ±0.30	.XX ±0.20	CHK: Kevin 06/11/17	DWG NO: S/A-435	REV. A0	
.XXX ±0.10	ANG ±1°	APP: Kent 06/11/17	SCALE: 1:1	SHEET: 1 of 1	