
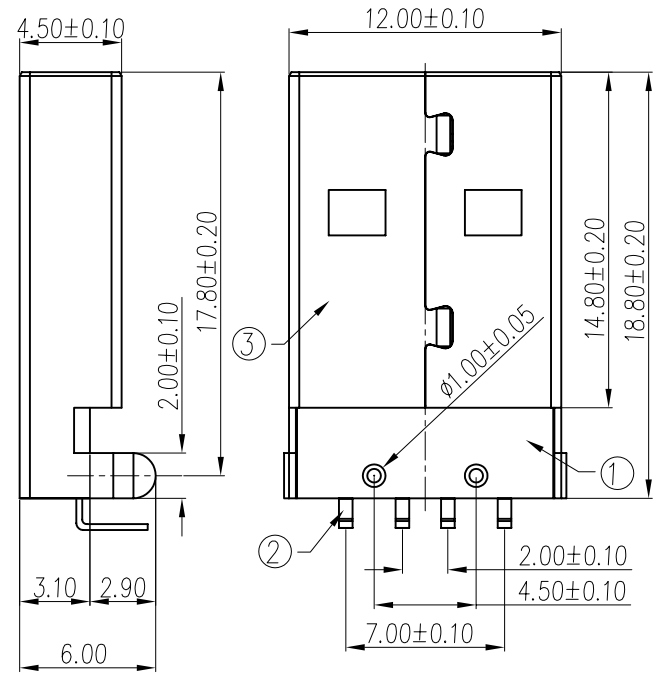
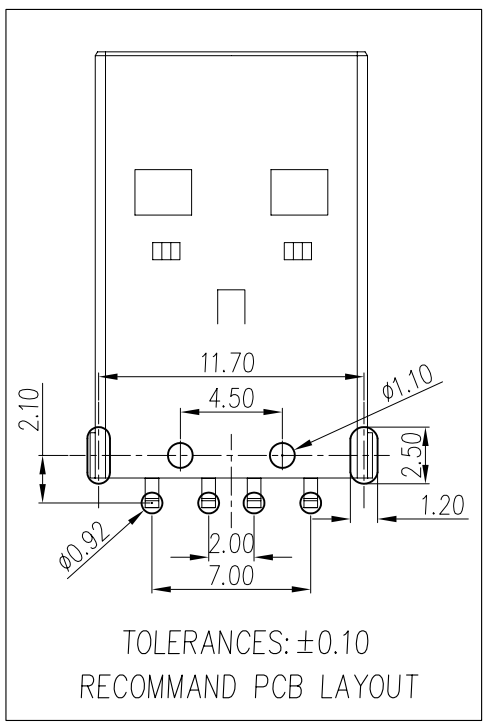



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

Specification:

1. Current rating: 1A Max.
2. Dielectric withstanding voltage: 30V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

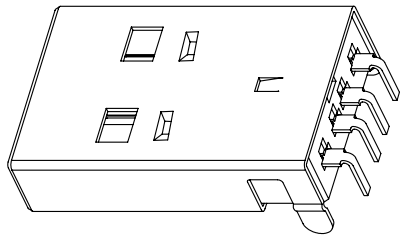

No.	Name	Q'ty	Material	Remarks&Thickness	Finish
3	Shell	1	Cold rolled steel	T=0.30mm	Cu: 40u"min. 80~120u"Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area: 0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area: 80~120u"Tin Plated over 40u"Nickel min.
1	Housing	1	PBT	UL 94-V0	Black

PRAT NO:		MATERIAL:		<b>HSI-CHIN ELECTRONICS CO.,LTD</b>	
MODEL NO:		FINSH:			
UNIT: mm	SAZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 劉永萍 06/11/03		USB-A(M) 90° DIP	
.X ±0.30	.XX ±0.20	CHK: Kevin 06/11/03		DWG NO: S/A-377	REV. A0
.XXX ±0.10	ANG ±1°	APP: Kent 06/11/03		SCALE: 1:1	SHEET: 1 of 1

ROHS Compliant