
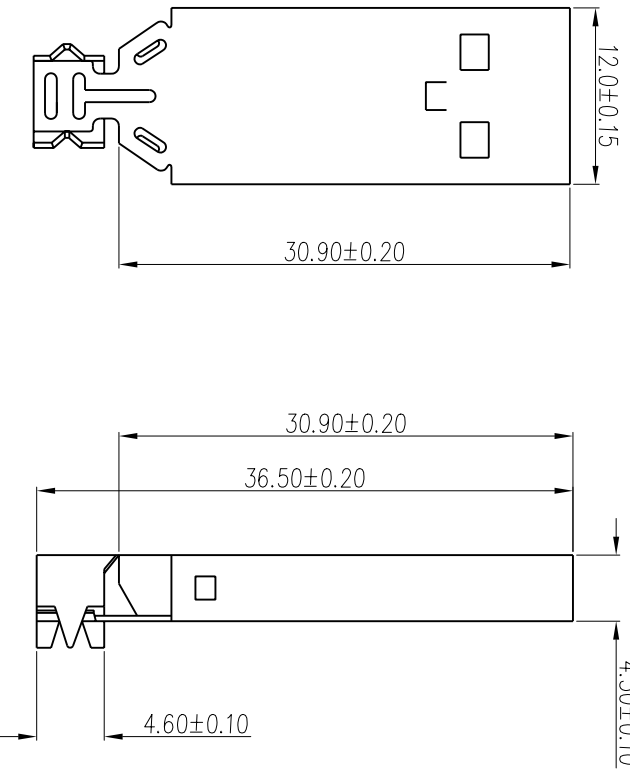


REV.	ECH NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

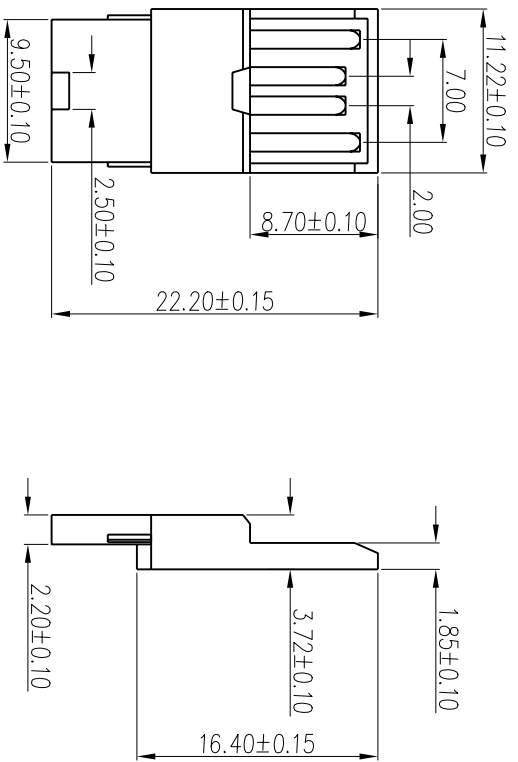

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass, t=0.20mm.
- 1.3 Shell: Cold Rolled Steel, t=0.35mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts: Gold flashed 1u", 3u", 5u", 10u", 15u", 30u".
- 3.2 Shell: Nickel plated.

No.	Name	Q'ty	Material	Remarks&Thickness	Finish
4	Back-shell	1	Cold Rolled Steel	T=0.35mm	Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.35mm	Nickel Plated
2	Contact	4	Brass	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory

PART NO:		MATERIAL:			
MODEL NO:		FINISH:			
UNIT: mm	SIZE:A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 黄义强 '06/04/05		USB-A TYPE SOLDER(M)半圆	
x ±0.3	±0.20	CHK: Kevin '06/04/05		DWG NO: S/A-276	
.xxx ±0.100	±0.100	APP: Kent '06/04/05		SCALE: 2:1	
AVG. ±T	±T			SHEET: 1 of 1	
				REV: A0	