

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Brass ,t=0.30mm.

2.Specification:

- 2.1 Rated voltage and current: 1.5A at 250V AC minimum.x.
 - 2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
 - 2.3 Contact resistance:Before life test 30m ohm Max.
After life test 50m ohm max
 - 2.4 Insulation resistance: 1000M ohm Min at DC 500V.
 - 2.5 Insertion force: 35 Newtons Max.
 - 2.6 Extraction force: 10 Newtons Minimum.
 - 2.7 Solderability:Terminal shall be immersed in flux before text,Then dip in molten solder for 5±0.5 sec. At 245±5°C
- 3.Finishes:
- 3.1 Contacts:Gold flashed 1u",3u",5u",10u",15u",30u".
 - 3.2 Shell: Nickel plated.

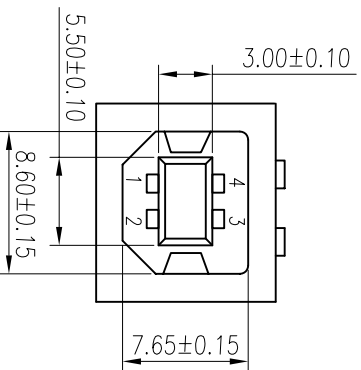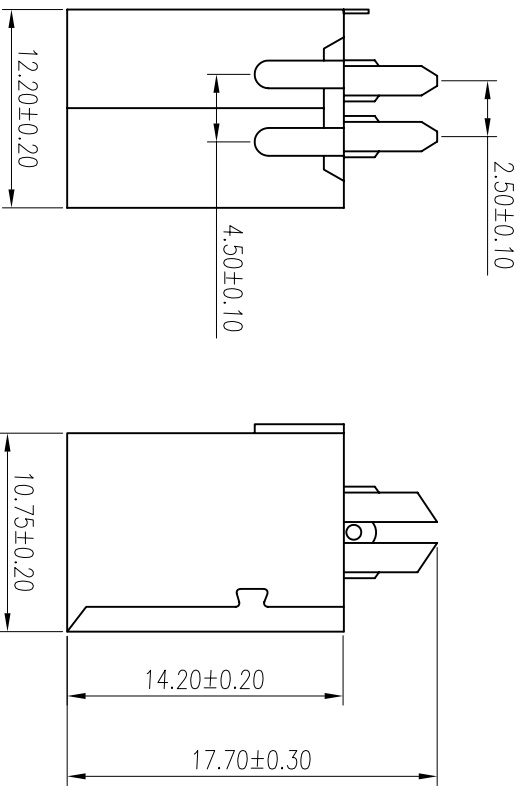

No.	Name	Q'ty	Material	Remarks & Thickness	Finish
3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory/White

PART NO:		MATERIAL:			
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 李霞 '06/05/09		USB-B TYPE SOLDER(F)	
x ±0.3	±0.20	CHK: Kevin '06/05/09		DWG NO: S/A-311	
.xxx ±0.100	±1	APP: Kent '06/05/09		SCALE: 2:1	
ANG.				SHEET: 1 of 1	
				REV: A0	