

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:





- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.30mm.
- 1.3 Front Shell: Cold rolled steel,t=0.40mm.
- 1.4 Back Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 6.5 Kgf Max.
- 2.6 Total unmating force: 3.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel,tin plated

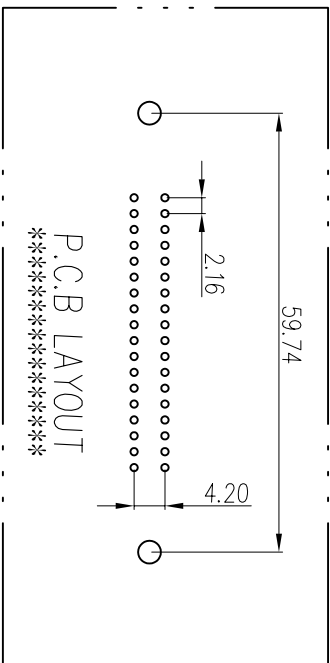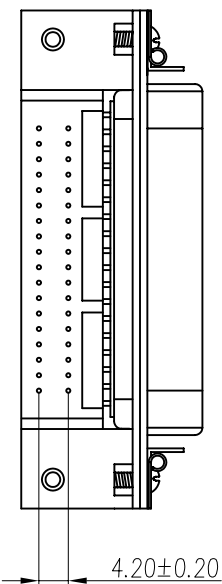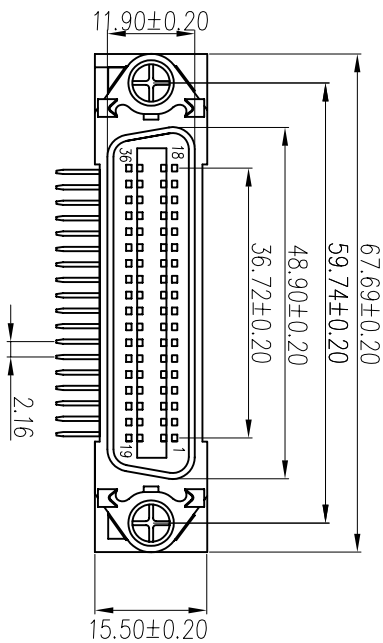

7	"L" type board-lock	2	Cold Rolled Steel	T=1.4mm	Tin Plated
6	Trangle	2	Cold Rolled Steel	T=0.60mm	Nickel Plated
5	Skew	2	Brass	φ5.2*7.2	Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	36	Brass	T=0.30mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/White/Blue
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:

MODEL NO:

UNIT: mm

SIZE: A4

COLOR:

TOLERANCE UNSPECIFIED	DR: 吳曉亮 '06/09/04	DWG NO:	S/A-235-01	REV:	AO
.x ±0.3	CHK: Kevin '06/09/04	SCALE:	1:1	SHEET:	1 of 1
.xxx ±0.20	APP: Kent '06/09/04				
ANG. ±0.100					
±T					

HSI-CHIN ELECTRONICS CO.,LTD

PART NAME: CENTRONIC RIGHT ANGLE P.B.C 36PIN
SOLDER(焊)三角片鎖片鎖十字NUT

DWG NO:

SCALE:

SHEET:

REV:

F

E

D

C

B

A

1

2

3

4

5

6

7

8

F

E

D

C

B

A

1

2

3

4

5

6

7

8