

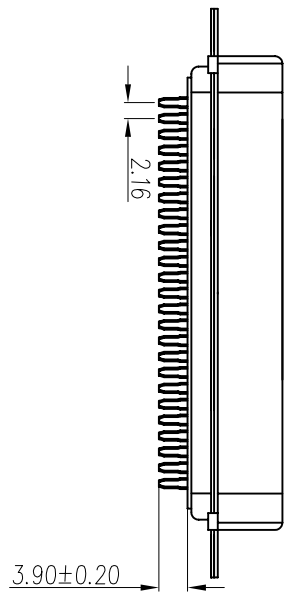


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

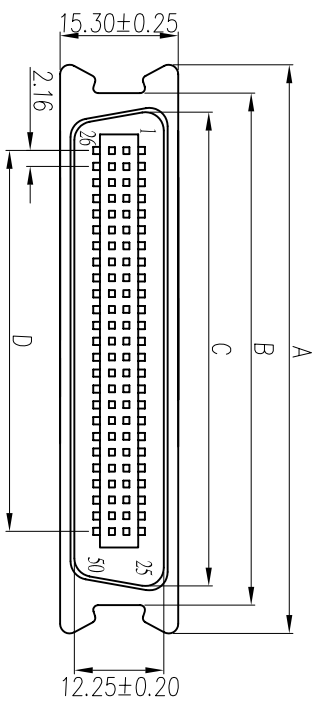

- Note:
- Material:
 - Insulator: P.B.T UL 94-V0 rated.
 - Contact: Brass,t=0.25mm.
 - Front shell: Cold rolled steel,T=0.50mm,0.60mm
 - Back shell: Cold rolled steel,T=0.4mm.

- Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 1000 MΩ Min at DC 500V.
 - Temperature range: -55°C~+105°C

- Finishes:
 - contacts: Gold flashed 1u",3u",5u",10u",15u",30u".
 - Shell: Nickel,tin or Gold plated.

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.50mm,0.60mm	Nickel Plated
2	Contact	56~50	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:	
MODEL NO:		FINISH:	
UNIT: mm	SIZE: A4	COLOR:	
TOLERANCE UNSPECIFIED		DR: 段林麗 '06/03/06	
x	±0.3	DWG NO:	
.xx	±0.20	CHK: Song '06/03/06	
.xxx	±0.100	APP: Kent '06/03/06	
ANG.	±1	SCALE: 1:1	
PART NAME:		SHEET: 1 of 1	
CENTRONIC SOLDER(M)一體		REV: A0	



F	A	B	C	D
PART NO	A±0.20	B±0.20	C±0.20	D±0.20
CN-36P	62.00	53.50	49.35	36.72
CN-50P	77.40	68.30	64.47	51.84