
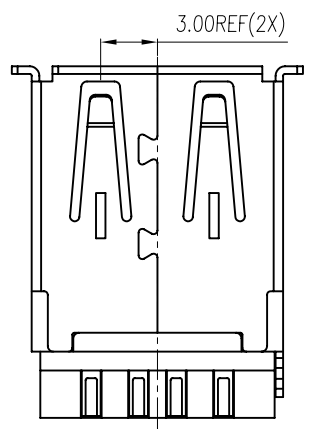
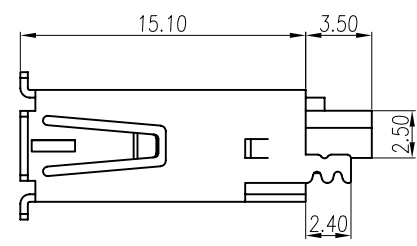
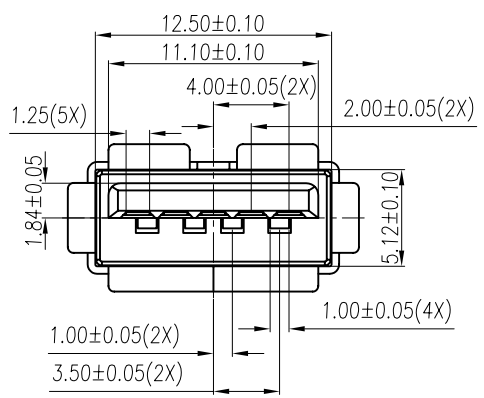


1 2 3 4 5 6 7 8

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

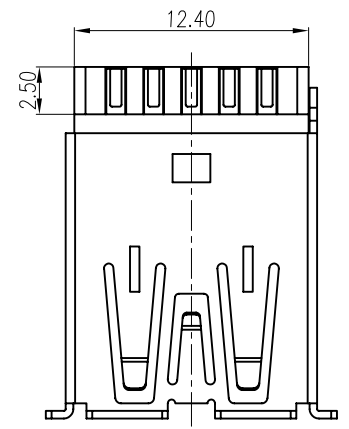

Note:

Specification:

- Rated voltage and current: 1A Max.
- Dielectric withstanding voltage: 30V(ac) for 1 minute.
- Contact resistance: Before life test 30m ohm Max.
After life test 50m ohm max
- Insulation resistance: 1000M ohm Min at DC 500V.
- Insertion force: 35 Newtons Max.
- Extraction force: 10 Newtons Min.
- Solderability: Terminal shall be immersed in flux before text, Then dip in molten solder for 5±0.5 sec. At 245±5°C
- Temperature range: -55°C~+85°C

5	Shell	1	Brass	T=0.40mm	Cu:40"min.80u"~120u"Nickel Plated
4	Contact 2	5	Brass	T=0.25mm	Contact area:2u" Gold Plated over 40u"Nickel min. Solder area:80~120u" Tin Plated over 40u" Nickel min.(or All Gold Plated)
3	Contact 1	4	Brass	T=0.25mm	Contact area:2u" Gold Plated over 40u"Nickel min. Solder area:80~120u" Tin Plated over 40u" Nickel min.(or All Gold Plated)
2	Hood	1	PBT	UL 94-V0	Blue
1	Housing	1	PBT	UL 94-V0	Blue
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PRAT NO:		MATERIAL:		HSI-CHIN ELECTRONICS CO.,LTD	
MODEL NO:		FINSH:			
UNIT: mm	SAZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 趙承寶 09/06/05		USB-A(F) SOLDER(3.0版)	
.X ±0.30	.XX ±0.20	CHK: James 09/06/05		DWG NO:	
.XXX ±0.10	ANG ±1°	APP: Kent 09/06/05		REV. A0	
				SCALE: 1:1	SHEET: 1 of 1

ROHS Compliant

1 2 3 4 5 6 7 8