



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

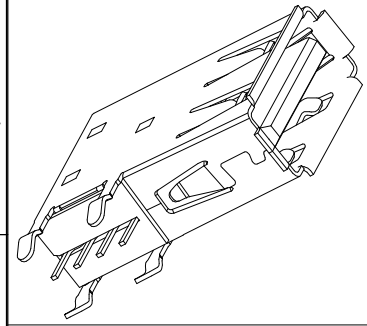

Top View

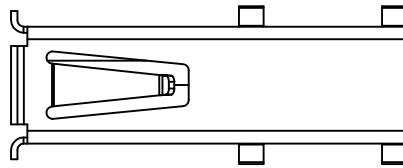


Note:


Specification:

- Rated voltage and current: 1A at 250V AC Min.
- Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
- Contact resistance: Before life test 30m ohm Max.  
After life test 50m ohm max
- Insulation resistance: 1000M ohm Min at DC 500V.
- Insertion force: 35 Newtons Max.
- Extraction force: 10 Newtons Min.
- Solderability: Terminal shall be immersed in flux before text, Then dip in molten solder for 5±0.5 sec. At 245±5°C
- Temperature range: -55°C~+85°C

Front View

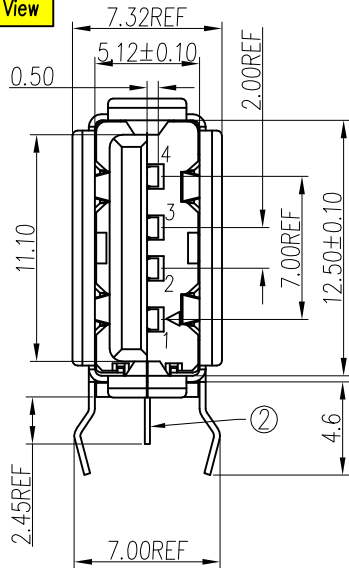


Side View

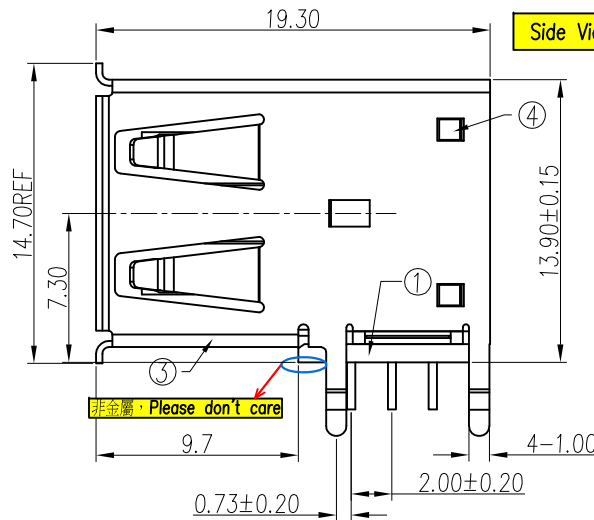

RoHS Compliant

No.	Name	Q'ty	Material	Remarks & Thickness	Finish
4	Back Shell	1	Brass	T=0.30mm	80u"min. Nickel Plated
3	Shell	1	KU570	T=0.30mm	100u"min. Nickel Plated
2	Contact	4	COPPER ALLOY	T=0.25mm	Contact area: 0.8u" Gold Plated over 40u" Nickel min . Solder area: 80u"min matte Tin Plated over 40u" Nickel min .
1	Housing	1	PBT	UL 94-V0	Black/White

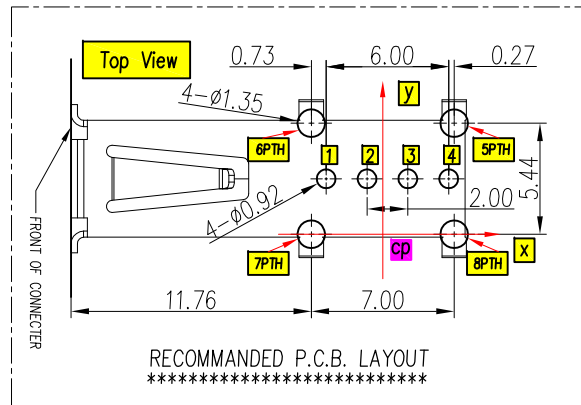

PART NO:		MATERIAL:			
MODEL NO:		FINISH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 劉志希 '11/12/26		USB-A(F)側向90° DIP(加後殼)	
.x ±0.30	.xx ±0.20	CHK: James '11/12/26		DWG NO:	S/A-400-06
.xxx ±0.10	ANG. ±1°	APP: Kent '11/12/26		SCALE: 1:1	REV: A0
				SHEET: 1 of 1	