
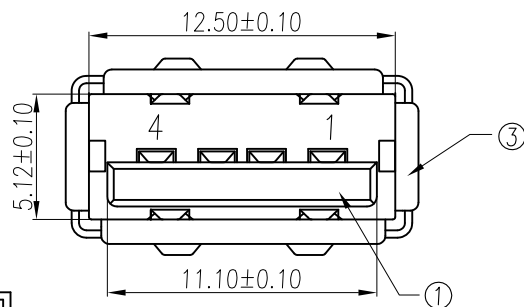
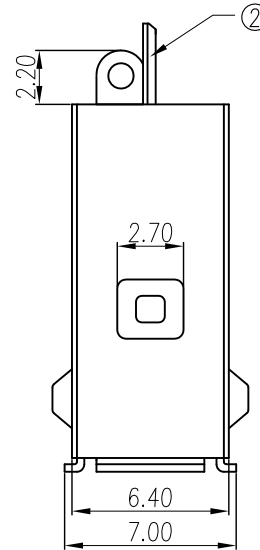
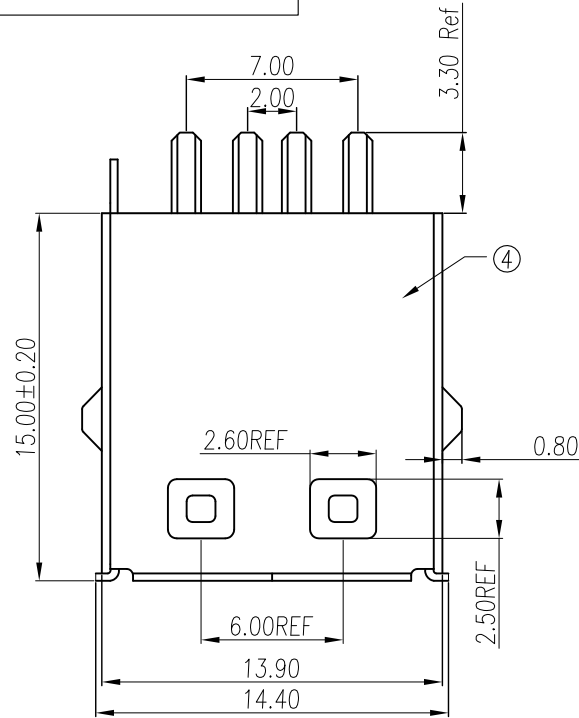


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

Specification:

1. Rated voltage and current: 1A at 250V AC minimum.
2. Dielectric withstanding voltage: 30V AC/1 minute without breakdown.
3. Contact resistance: Before life test 30m ohm max, After life test 50m ohm max.
4. Insulation resistance: 1000M ohm min.
5. Insertion force: 35 Newtons maximum.
6. Extraction force: 10 Newtons minimum.
7. Solderability: Terminal shall be immersed in flux before test, Then dip in molten solder for  $5 \pm 0.5$  sec. At  $245 \pm 5^\circ\text{C}$ .

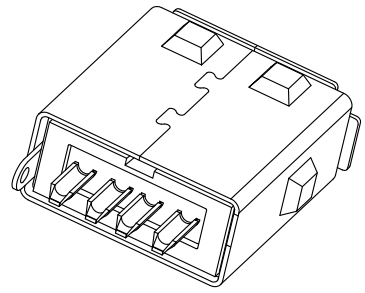

4	Hood	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
3	Shell	1	Brass	T=0.30mm	80u"min Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area:0.8u" min Gold Plated over 40u" min Nickel. Solder area:80u" min Tin Plated over 40u"min Nickel .
1	Housing	1	P.B.T	UL 94-V0	Black/White
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:			
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 李霞 '06/05/08		USB-A(F) SOLDER加外套	
.x ±0.30	.xx ±0.20	CHK: Kevin '06/05/08		DWG NO:	S/A-402
.xxx ±0.10	ANG. ±1°	APP: Kent '06/05/08		SCALE: 1:1	SHEET: 1 of 1
				REV: A0	

ROHS Compliant